

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 198 069 A1**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
17.04.2002 Bulletin 2002/16

(51) Int Cl.7: **H04B 1/20**(21) Application number: **01306069.4**(22) Date of filing: **13.07.2001**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventors:  
• **Hayes, Patrick H.**  
Mission Viejo, California 92691 (US)  
• **Escobosa, Marcus**  
Placentia, California 92807 (US)  
• **Conway, James N., Jr.**  
Corona Del Mar, California 92625 (US)

(30) Priority: **13.07.2000 US 615473**


(71) Applicant: **UNIVERSAL ELECTRONICS, INC.**  
Cypress, California 90630-4841 (US)

(74) Representative: **Kinsler, Maureen Catherine et al**  
Kilburn & Strode,  
20 Red Lion Street  
London WC1R 4PJ (GB)

**(54) Customizable and upgradable devices and methods related thereto**

(57) A customizable and an upgradable remote control (10) is provided which may be customized or upgraded via a Web site (30) or through other remote, and preferably interactive, processes. A database (12) is provided which includes a plurality of functions of a consumer electronic device, such as a T.V. or and DVD player. A user selects among the plurality of functions at least one of the desired functions. In response to the user selection a virtual configuration is created to virtually configure the customized remote control (10). The virtual configuration may be downloaded to the customizable remote control (10). Preferably, the customizable remote control (10) is provided with a plurality of preprogrammed standard keys and a plurality of configurable

keys. A plurality of customized labels corresponding to the plurality of configurable keys may be provided separately or printed as part of the virtual configuration download process. More generally methods for providing a customized consumer electronic device are disclosed, including a preferred embodiment using a touch screen remote control. In one embodiment a database of command codes operable with a hand-held device is maintained. A user is allowed to access the database via a Web site (30). The user may then download at least one of the plurality of command codes provided in the selection. The hand-held device may also be utilized in an interactive environment. Such an interactive environment may include pay-per-event access, and the like.

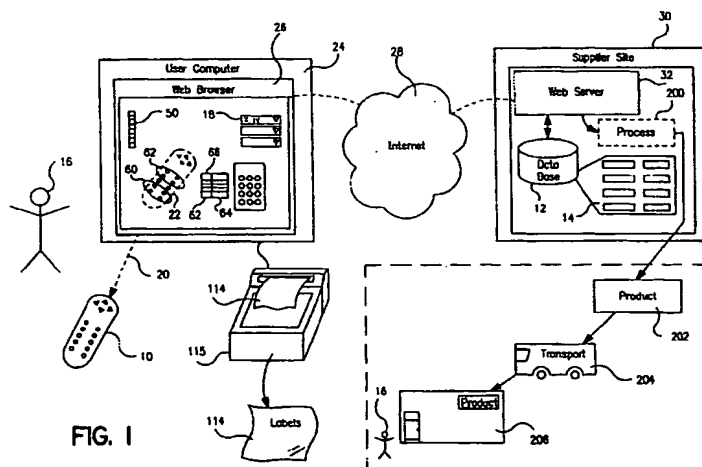**FIG. 1****BEST AVAILABLE COPY****EP 1 198 069 A1**

## Description

### FIELD OF THE INVENTION

[0001] The present invention relates to hand-held electronics and control modules, as well as electronic commerce related to these products. Specific exemplary embodiments discussed relate to hand-held remote controls.

### BACKGROUND OF THE INVENTION

[0002] The description of art in this section is not intended to constitute an admission that any patent, publication or other information referred to herein is "prior art" with respect to this invention, unless specifically designated as such.

[0003] While the present invention relates to hand-held electronics and control modules generally, it will be better understood within the discussion of exemplary embodiments directed toward remote controls generally, and universal remote controls specifically. Universal remote controls typically offer a preprogrammed set of standardized keys for each device type supported. These provide for the common operational functions of the device but do not necessarily offer the full range of features available on the original manufacturer's remote.

[0004] U.S. patents and applications relevant to remote control technology include U.S. Pat. Nos. 5,515,052; 5,255,313; and U.S. Pat. App. Ser. No. 09/418,091 filed October 14, 1999, which are incorporated herein by reference. Pat. '052 discloses a universal remote control with function syntheses. The remote control comprises driver circuitry for communicating code signal generation sequences including a code generated command signal followed by a code setting signal; and memory for storing information therein. Pat. '313 discloses a universal remote control system having a signal generator to transmit signals which will cause specific functions to occur in specific controlled devices. Pat. App. Ser. No. '091 discloses means and methods for operating a remote control.

[0005] Users of universal remote controls who need access to one or more functions not preprogrammed into the unit must then use a learning capability or a feature, such as a function synthesizer (e.g., the function synthesizer discussed in Pat. '052) to add the desired extra functions to their remotes. Other U.S. Patents related to remote control technology, and in particular, relating to learning technology include U.S. Pat. Nos. 4,959,810; 5,228,077; and 5,537,463, which are incorporated herein by reference.

[0006] Pat. '810 discloses means for transferring instructions and/or data to RAM wherein the instructions and/or data is transferred from a source external to the RAM. Pat. '077 discloses a remotely upgradable universal remote control. Pat. '463 discloses means in the re-

mote control for picking up an electro-magnetic signal from an electro-magnetic signal source and storing output signal data in memory. The output signal data stored in memory may correspond to control function data which may be transmitted to a device to be controlled.

[0007] While the above described technologies may allow users to ultimately reach the desired level of functionality, the technologies and methods often suffer from significant drawbacks. For example, learning is generally only possible if the original remote control is available — if the original remote control is lost or broken, a learning system generally cannot be used. Another problem is that function synthesizer codes must generally be obtained from a live customer service representative for the specific brand and model of device the user owns. This requirement to interface with a live merchant or supplier, often results in greater cost. Also, both learning and synthesizer data require storage space in the remote control's nonvolatile memory. The nonvolatile memory can become full. This limits the amount of learned or synthesized data which can be stored. For example, a combination of programmed command sets may be required to obtain the desired functionality, but only a portion of the command set is loadable. The remaining sets may not be able to be loaded onto the remote control because the portion of command sets has already filled the memory. Therefore, all desired sets of preprogrammed data may not fit in memory. Additionally, key legends, (e.g., identifications) on the remote control, do not generally indicate the added functions. The more one attempts to customize a remote, the more difficult key identification becomes. The user must remember where each function was placed.

[0008] In practice, many users do not bother to program their remote control. They either learn to live "mildly dissatisfied" with the remote control "as is" or abandon the universal concept entirely in favor of purchasing the same brand of equipment across the board and using that manufacturer's (i.e., brand of) unified remote. This preference for single-brand use has been shown through use of focus groups in which the participants indicated that they owned only one brand of equipment for exactly this reason — difficulty in programming.

### SUMMARY OF THE INVENTION

[0009] As the invention is in part directed toward e-commerce, U.S. Patent No. 6,029,141, which is directed to an Internet-based system, is incorporated herein by reference. Readers will find the discussion of the terms and acronyms particularly useful. However, Pat. '141, is incorporated for all that it teaches.

[0010] The present invention addresses the above shortcomings of the universal remote control product by allowing the user to configure and purchase a personally customized remote control either via a Web site or through a computer located in the dealer's store, for example.

[0011] Accordingly, the present invention teaches a method of providing a customized remote control. A database including a plurality of functions for a consumer electronic device is provided. A user is enabled to select among the plurality of functions at least one desired function. The user is then allowed to virtually configure the customized remote control, whereby a virtual configuration is created. The virtual configuration is then downloaded to the customizable remote control to transform the customizable remote control into a customized remote control. A similar process may be used to transform an upgradable remote control to an upgraded remote control. These steps may generally be repeated as desired.

[0012] The customizable remote control, in one embodiment, comprises a case and a plurality of preprogrammed standard keys on the case. A plurality of configurable keys are included on the case. The remote control also includes a plurality of customized labels (or in some embodiments, customizable labels) corresponding to the plurality of configurable keys. The customizable remote control may also include means for assigning at least one function to at least one of the plurality of configurable keys.

[0013] Another objective of the present invention is to provide a simplified user interface. In a preferred embodiment the simplified user interface is repeatedly customizable to match a user's changing tastes and needs. The simplified user interface may comprise a remote control having a touch screen for accessing basic functionality and customized functionality and for selectively customizing one or more keys.

[0014] It will be apparent from the teachings disclosed herein that a customized consumer electronic device may be provided via a Web site. The user is allowed (and therefore, enabled as well) to access the Web site and select among a plurality of functions performable by the consumer electronic device. The user is also allowed (through provision of appropriate instructions in the remote or via the Web that provide operative capability) to create a virtual configuration for the consumer electronic device by selecting at least one of the plurality of functions. In a preferred embodiment, the customized consumer electronic device is a remote control, and the functions include control functions for controlling another consumer electronic device, e.g., a DVD player.

[0015] A method of modifying a remote control taught herein includes providing a database of function command codes, wherein the database is accessible to a user. Included in the database of function command codes is a plurality of command sets comprising function command codes corresponding to a respective plurality of consumer electronic devices. That is, the database preferably has a corresponding command set for each device. A Web site is maintained that enables a user to select at least one of the plurality of command sets via the Web site. The user is then enabled to download the at least one of the plurality of command sets.

[0016] A hand-held device may be upgraded according to a method of the present invention. In a preferred embodiment, a user is provided with a selection including a plurality of command codes maintained in a database. The database comprises command codes operable with the hand-held device. The user is enabled to download at least one of the plurality of command codes provided in the selection.

[0017] A customized hand-held device according to the present invention includes a hand-held unit, or case, and preferably having a display screen. Memory communicable with the display screen, preferably, includes at least three programming sets for respectively controlling at least three devices. At least two of the at least three programming sets are associated with a common (i.e., the same) brand, e.g., Sony. Set up programming for enabling a user to select at least one of the at least three programming sets during a set up mode is preferably stored in memory. The at least two programming sets associated with the common brand are preferably represented, e.g., displayed, in a prioritized order. In a preferred embodiment, the display screen includes a touch screen adapted to display keys. The at least one programming set preferably assigns a plurality of codes to a respective plurality of the keys. Thus, the one programming set may be used to, for example, assign Sony T.V. control functions to touch screen display keys whereby the user may control the T.V. Accordingly, in a preferred embodiment, the display screen is a touch screen.

[0018] From the foregoing it will be apparent that an objective of the present invention is to provide a user with a customizable hand held device. It is the further object of the present invention to enable the user to customize the customizable hand-held device with minimal additional human input. Further objective is to provide this customizable handheld device in the form of a remote control having a touch screen. Another objective is to provide computer readable medium, microchips, microcontrollers, etc. having operative programming and instructions for assembling a customizable remote control.

[0019] Another object of the present invention is to provide one with the ability to perform design trade-offs on a hand-held device and have a customized hand-held device provided according to those trade-offs. A further objective is to allow the ultimate user to be the one performing the design trade-offs.

[0020] Another object of the present invention is to provide a more efficient manufacturing and distribution system wherein the involvement of intermediate distributors is minimized. A further object of the present invention relates to providing hand-held control devices.

[0021] Other objects and advantages in accordance with the present invention will be apparent to those of skill in the art from the teachings disclosed herein.

## BRIEF DESCRIPTION OF THE DRAWINGS

[0022] In the interest of enabling one of skill in the art to practice the invention, exemplary embodiments are shown and described. For clarity, details apparent to those of skill in the art and reproducible without undue experimentation are generally omitted from the drawings and description.

Fig. 1 schematically depicts a method of providing a customizable hand-held device according to an embodiment of the present invention.

Fig. 2 depicts a home page of a Web-based download center.

Fig. 3 depicts a sign-on screen for a supplier's Web site whereby access to downloadable functions may be obtained.

Figs. 4(a)-4(b) depict parts 1 and 2, respectively, of a selection screen. The scroll bar is adjusted to move the page up and down in the browser frame.

Fig. 5 depicts the selection screen of Fig. 4 after selections have been made. For clarity the screen snap shot is centered on the selections.

Fig. 5a depicts a remote control with a touch screen. Multiple code sets for a single brand and device type are shown with means for determining the operable code set.

Fig. 5b depicts a customization screen where the user may configure his desired remote control key function assignment.

Fig. 6 depicts a download screen including instructions for downloading command code upgrades.

Fig. 7 depicts a payment screen.

Fig. 8 depicts an image representing a customizable remote control including preprogrammed keys and configurable keys. The labeling means comprises printable (or pre-printed) labels.

Fig. 9 depicts the remote control of Fig. 8 with configured keys indicated.

Fig. 10 depicts an embodiment of a configurable remote control wherein the labeling means comprises label strips.

Fig. 11 depicts a customizable remote control including a display screen, wherein the labeling means includes the display screen if so programmed.

Fig. 12 depicts a remote control incorporating a touch screen.

Fig. 13 depicts the touch screen remote control of Fig. 12 displaying secondary pages for accessing additional functions.

Figs. 14-15 depict key layouts being downloaded to the corresponding touch screen remote controls.

Fig. 16 depicts a remote control for use in an interactive environment. The remote control is shown with a prepaid icon for accessing an event.

Fig. 17 schematically depicts a method of providing a user with a hand-held device.

## DESCRIPTION OF EXEMPLARY EMBODIMENTS

[0023] The present invention is discussed in relation to remote controls, however, other uses will be apparent from the teachings disclosed herein. The present invention will be better understood from the following detailed description of exemplary embodiments with reference to the attached drawings, wherein like reference numerals and characters refer to like parts, and by reference to the following claims.

[0024] In one embodiment a manufacturer builds a "base" remote control (e.g., customizable remote control). The keypad of the remote will preferably include a small set of basic functions expected to be required by everyone (e.g., volume, channel, digits, and power) together with a number of blank keys (e.g., configurable keys). Provision will be made on the remote to custom label these blank keys, either via a stick-on overlay, or by some kind of transparent cover under which a paper insert can be placed, or by other compatible methods. The remote may then be sold at retail to the ultimate consumer who logs onto a Web site from home (or via a computer in a store) and enters the data on his particular devices (e.g., type, brand, model). Note that access to the data need not be confined to a path through a Web site, but may, for example, be via a direct connection (e.g., a dedicated computer or dedicated line). If the consumer is not sure about specific brand or model information of devices he wants to control, he can, for example, take the remote home and determine the desired device code by experimentation using the basic pre-programmed functions. These so-called step-and-set programming methods and other methods to identify the device of interest are well covered in the patents discussed above (and incorporated by reference).

[0025] In an alternative embodiment, the table of functions presented to the user comprises a subset of all possible functions available for the particular set-up code, said subset being automatically determined based on model number information entered by the user. For example, the total code set available for a given manufacturer (brand) format may include functions for controlling a TV picture-in-picture feature. However, if it is known that the user's particular model does not offer this feature, then the choices offered the user can be simplified by omitting these codes.

[0026] Once the devices are defined (identified), the customer is then presented with a series of screens, one for each device mode, for example, each screen showing an outline of the remote together with a table of all functions available for that particular set-up code. Using a "drag and drop" interface, for example, the user configures the blank keys on the displayed remote to contain the specific functions he desires. When completed, the computer then downloads the user's custom configuration into the remote (using a serial cable, a magnetic modem such as described in Pat. '463, or any other suitable interface).

[0027] For convenience, the user may print a label set to be installed on the remote. In an alternative labeling approach, the computer could transmit the label data (preferably as a part of the virtual configuration) to a center where a more durable label, e.g., a mylar overlay, would be pad printed and mailed to the user. As is well known in the art, the "cookie" feature of the user's browser software can be used in this application to locally store information regarding previous configuration choices for later reference by the configuring software resident on the Web site. The durable label might also be provided as an optional accessory which the user could order in addition to receiving the "on the spot" paper label. If the consumer subsequently wanted to change the key configuration or he purchased a new device to be controlled, he can simply log onto the Web site and repeat the process as often as desired to upgrade his control device. Accordingly, the user would be enabled to change a portion of the configuration while leaving, at least some, previously customized configurations unchanged.

[0028] Fig. 1 schematically represents a method of providing a customized remote control 10. Similar methodology may be used to upgrade an existing remote control. Therefore, the terms "customized remote control" and "upgraded remote control" may generally be used interchangeably, however, distinction will be made where warranted. In the method depicted in Fig. 1 a database 12 includes a plurality of functions 14 for a consumer electronic device (not shown). For example, the database may comprise a plurality of command sets including a command set for each selectable consumer electronic device. The command set includes functions (e.g., signal data which may be transmitted to the consumer electronic device) to control the devices. The user 16 is enabled (provided with the capability) to select among the plurality of functions at least one desired function 18. In Fig. 1 the desired function 18 is shown as function X for a T.V. The user then creates a virtual configuration (not shown) for the customized remote control 10 which may be downloaded to the remote control 10 as indicated by communication line 20. In one embodiment, an image 22 representing the remote is displayed. The remote 10 may be shipped to a predetermined location, such as the user's home, prior to downloading the virtual configuration. In another alternative, the virtual configuration is downloaded to a predetermined location, such as the manufacturer's factory, where the virtual configuration may be installed in, e.g., uploaded to, the remote. This may be achieved through use of a medium, e.g., a chip or memory, having the configuration stored thereon, whereby the medium is then installed. The customized remote may then be shipped elsewhere. In one embodiment, a blank unit may be shipped to a location, for example, to the user or the manufacturer, where it may be configured, or upgraded if originally shipped with data.

[0029] In the method depicted in Fig. 1 the user 16

accesses a computer 24 having a Web browser 26. The computer is connected to the Internet 28. A supplier site 30 having a Web server 32 is also connected to the Internet 28. The user 16 may, thus, access the database 12 via the supplier site 30. The supplier site is preferably the supplier's Web site, but more generally may be a location of the supplier (whether physical or virtual) which is accessed via a Web site or dedicated path.

[0030] Figs. 2-7 display Web pages (or screens) associated with the supplier site 30. Fig. 2 shows the home page 34 of a Web based download center. Fig. 3 shows a sign-on screen 36. The sign-on screen 36 includes a location 38 for receiving a unique identifier 40 of the customized remote control 10 (or upgradable remote control). In some embodiments, the function or code selection may be provided based upon the identifier 40 of the remote 10. The unique identifier 40 requested in Fig. 3 is the serial number of the remote control.

[0031] It will be appreciated that, in general, a Web site such as is shown in Figs. 2 through 7 can be used for multiple purposes. Examples of such purposes are downloading new device types or functions, extending features, upgrading code libraries and the like, in addition to offer users an ability to create customized remote control configurations. The discussions that follow, however, will focus primarily on the customization capabilities of such a site.

[0032] Figs. 4(a) and 4(b) show parts 1 and 2, respectively, of a selection screen 42. Figs. 4(a) - 4(b) show a selection 44 of a plurality of consumer electronic device types, such as satellite receivers, T.V.'s, VCR's, etc. The user 16 is provided with a brand selection 46 for each type of the selection 44 of the plurality of electronic device types. Each brand selection 46 is provided via a pull down brand menu 48.

[0033] To, in part, avoid overloading memory in the customizable remote control 10, the user is provided with a memory indicator 50 indicating, preferably on a percent basis, how much memory is available in the remote 10 for adding another (or the first) device type/brand combination selection to the virtual configuration for downloading. Memory usage may be maintained locally via a "cookie" process or remotely, e.g., at the supplier's site. In another embodiment, the indicator 50 represents the amount of memory the download will use without regard to the amount of data already stored in memory. This may also be presented without regard to the capability of the particular remote being modified. As Figs. 4(a) and 4(b) are shown prior to the user making a selection, the memory indicator 50 is shown empty.

[0034] Fig. 5 shows the selection page 42 after brand selection has been made for some of the device types. The memory indicator 50 shown in Fig. 5 now indicates the amount of memory the virtual configuration (the download) will take. Preferably the memory indicator 50 will also indicate the available memory for storing the virtual configuration.

[0035] In the event that the brand requested has mul-

multiple possible sets of IR function codes (for example, a brand such as Sears™ or Radio Shack™ may include private label products produced by several different manufacturers), an embodiment of the invention can include a step in which multiple basic (non-customized) sets of IR codes are first downloaded into the remote and presented to the user to allow him to determine via experimentation which code is applicable to his specific device. This embodiment is particularly useful when the user does not have his device model number available, or the model number provided is not recognized by the system.

**[0036]** Fig. 5a illustrates such a multiple code set embodiment. The remote 10a shown has been loaded (via, for example, a download process or memory installation process) with four possible code sets 49 corresponding to a brand name 48a (shown generically as "your brand") provided by the user. These codes (or more specifically, icons representing the code sets) are displayed in tabular form together with the prompt "Your brand has multiple types . . . try each one in turn" and a few test buttons 49a comprising a small subset of the full functionality of the corresponding code. The user highlights each possibility in turn and uses the test buttons ("PWR" and digit "1" in this example, although any other suitable subset can also be used) to check if that code operates his device. In a preferred embodiment, the codes to be tested are ordered by popularity, i.e. the one most likely to operate that brand of equipment/device is listed first, the next most likely listed second, and so on. Such prioritization serves to expedite the test and selection process for the majority of users (based upon popularity). Once the user has ascertained which code corresponds to his device, touching the "OK" button 49b immediately (in a preferred embodiment) sets the remote to use that basic command set. The remote may also identify to the user which set of extended commands should be requested if and when he proceeds to the next (customization) step of programming his remote.

**[0037]** Fig. 5b shows the next step, after that shown in Fig. 5, in the process of interactive configuration of a customized remote control. Having selected device type 44a, brand 46a (and if necessary, mode) the user is now presented with a display 22 showing a representation of the universal remote control product key layout 23 together with a selection 66a of possible key functions tailored to this specific device and brand. (See also the below discussion regarding assignment table 66). The user is now able to "drag and drop" key functions onto the remote control display 22 as desired. In the example shown, the remote is displayed with certain common function pre-selected (digit keys, power) and key functions the user has already added ("TV/Video", "Sleep", "SRS", and "Hue+") to be available on this remote. Fig. 5b shows the user is in the process of dragging the function "Hue-" across his remote key layout 23. When complete, the user moves to the next step, downloading this custom configuration into his remote 10, by clicking the

"Next" button 66b shown. In different embodiments, the pre-selection of common functions may be omitted to allow the user complete flexibility. Alternatively, these may be selectable as "groups" of functions instead of individual keys (for example, the digits 0 through 9, volume up/down and mute, etc.). Note that while the example shown in Fig. 5b and described above is for a remote control with an LCD touch screen capability, it should be appreciated that the configuration process for a "hard button" remote, such as shown in Figs. 8 - 9, is essentially the same. Likewise for other types of touch screens.

**[0038]** Fig. 6 shows a download screen 52. In the embodiment shown, the download screen 52 displays instructions 54 for downloading, during a setup mode, an upgraded code selection via the speakers of the computer. If sufficient memory is available, the user 16 may download additional command sets, either separately or in a single download. In this manner, the remote 10 may be upgraded as well as customized.

**[0039]** Fig. 7 depicts a payment screen 56. In some embodiments, the payment information 58 is associated with the unique identifier 40 of the hand-held device, whereby the user 16 need only enter the payment information once, preferably, per device to be customized or upgraded. In other embodiments the one-time-entered payment information is protected via a personal-identification-number (PIN) system, for example.

**[0040]** Referring to Fig. 1, newly configured keys 60 are preferably indicated (see also Fig. 9). Configurable keys 62 are preferably also displayed. Note that generally the configured keys 60 are a subset of the configurable keys 62. However, in some embodiments, the keys are "one-time" configurable and thereby removed from the set of configurable keys after they are configured. In some embodiments, the one-time configurable keys may still be configured multiple times by, for example, replacing memory cards or chips, etc. In one embodiment, the configurable keys are displayed with the configured, or assigned, function 64 in an assignment table 66.

**[0041]** Figs. 8-10 depict a configurable remote control 100. The configurable remote control 100 may be a customizable remote control 10 or an upgradable remote control, for example. Fig. 11 depicts a configurable remote control 100A which is an embodiment similar to that shown in Figs. 8-10. The configurable remote control 100 includes a plurality of preprogrammed standard keys 102, a plurality of configurable keys 104 and means for assigning at least one function to at least one of the plurality of configurable keys 104. The means for assigning at least one function preferably includes means for providing the user 16 with access to the database 12 of the plurality of functions 14.

**[0042]** Figs. 8-11 show a variety of means for labeling the configurable keys 104. In one embodiment, the means for labeling includes a recess 106 around the configurable keys 104, wherein the recess accommo-

dates a label 108 and a transparent lens 110, (or protective cover 110). In the embodiment shown in Fig. 8, the label 108 is a precut, printable label and the transparent lens 110 is a clear snap-on lens. The remote 100 of Fig. 8 also includes an additional area 112 for customizing types of devices supported by the remote 100. More generally, the modes of the remote 100 may also be customized and identified. Generally, different modes will also correspond to different devices. In one preferred embodiment, the precut labels 108 are provided on carrier sheets 114. Referring to Fig. 1, the computer 24 may be connected to a printer 115 for printing labels on the carrier sheets 114.

[0043] Fig. 9 shows the configurable remote control 100 of Fig. 8 wherein the configurable keys 104 include configured keys 116. In the embodiment shown in Fig. 9, the configured keys are indicated to the user by highlighting the configured keys 116.

[0044] Fig. 10 depicts an embodiment wherein the labeling means comprises labeling strips 118. The labeling strips 118 may be preprinted with commonly requested functions or printed with downloaded functions similar to the labels 108, for example. Alternatively, the user 16 can customize the labeling strips 118 on plain paper, cut them out, position them in the recess 106 and secure them in place with the transparent lens 110. Fig. 11 depicts the configurable remote control 100A which includes a display screen 120. The display screen 120 is preferably an LCD screen. Accordingly, the labeling means may, also, or alternatively, comprise the display screen 120. An alternative embodiment uses a remote such as remote control 100B incorporating a touch screen LCD 122 as shown in Figs. 12 and 13. In this implementation, the included basic functionality is provided on one screen, or page, 122A shown in Fig. 12, while the user selected configurable key functions are presented in one or more secondary pages 122B, accessible via a button 124 on the first page 122A, as shown in Fig. 13.

[0045] In yet another embodiment of a universal remote control, it is considered advantageous if the key layout of the universal remote could closely match that of the original remote control supplied with the user's equipment. On a conventional (i.e. hard key) universal remote, this is, of course, not possible and on these units the (fixed) key layout represents the manufacturer's best compromise at a layout suitable for as many different brands/models of original equipment as possible. Even in a remote control of the type with an LCD display and touch screen input, though the unit may have the physical capability to display a different set of key shapes/layouts for every brand/model of original equipment remote control, practical limitations prevent supporting all code combinations. For example, the large amount of memory that would be required to store all the different key shapes and layouts corresponding to every possible device model and type to be supported generally is not practical for most applications. Plus,

such a unit, even if practical, would at best only have layouts for those items of consumer electronics (CE) equipment that existed at the time the unit was manufactured, and would still require generic screen layouts to support devices whose layouts are not in its library. (Note that many CE manufacturers will use the same IR codes from model to model or year to year, even though remote designs and layouts may change.)

[0046] However, if individual screen layouts were available on a Web site where a consumer could browse by, e.g., brand/model until he found a matching picture of his original remote control. He could then download into the universal remote a corresponding key arrangement and memory capacity would thus not be an issue since only the layouts corresponding to the consumer's current equipment need to be stored in the remote. Examples of this approach — original remote 126 and 126' and corresponding layout on an LCD remote 128 and 128' — are shown in Figs. 14 and 15, respectively.

[0047] In yet another embodiment of a remote control with display capability, the user accesses a Web site to download not the device IR command codes themselves, but rather sequences of pre-programmed instructions to perform various operations. These may include items such as channel tuning command sequences to facilitate tuning to a particular program on TV; pre-defined sequences for setting up or configuring consumer entertainment appliances and equipment; private access codes or numbers for use in an interactive TV environment, whereby one-time premium series such as sports events or pay-per-view moves are activated; and other applications.

[0048] In an example of pre-programmed instruction, a user who has just purchased a new home theater audio amplifier may be instructed to log onto a particular Web site where, after identifying the brand/model equipment he has just purchased, not only is the code data for that device downloaded into his remote, but also a set of instructions and remote control sequences which facilitate setup and adjustment of the system. Such instructions and sequences may, for instance, include macro sequences or steps for balancing the volume levels on the surround sound speakers, setting equalizer values to match room acoustics, etc.

[0049] Another example is discussed with reference to an interactive TV environment. A user might log onto a Web and browse a menu of available premium programming offers — sports events, recent moves, etc. In order to purchase items, the user after providing a credit card number or similar method of payment, has downloaded into his remote control an logo/icon for display on the remote LCD, together with a numeric code to be transmitted to the interactive TV (or STB) when that icon is touched. The numeric code transmitted has the effect of validating the consumer's purchase of the program and "unlocking" the receiver to allow access to it. Fig. 16 shows how such an item might appear on the remote 130 when, in this case, the user had pre-pur-

chased the pay-per-view (PPV) movie "Desert Antics". In this depiction, the pre-paid icon 132 appears next to the same screen as the regular channel changing buttons, alternatively these paid purchase icons (PPIs) can be displayed on a separate page reserved partly or entirely for the function.

**[0050]** It will be appreciated that while the above descriptions and examples are presented with reference to a remote control including LCD display capability, other types of devices are also suitable; for example, PDAs of the type marketed under the trademarks Palm™, Handspring™, and others, especially when equipped with aftermarket IR remote control hardware and/or software such as is available from vendors such as Pacific Neo-Tek, Inc.

**[0051]** Referring to Fig. 1, a complimentary, or alternative, method of providing a hand-held device, or a component related thereto, to the user 16 is schematically shown. The supplier, through a predetermined process 200 creates a product 202 which is then transported, i.e., shipped, via transport 204, to a predetermined location 206. In a preferred embodiment, the predetermined location 206 is not only accessible to the user 16, but is co-located with the user computer 24. In alternative embodiments, the predetermined location 206 may be a store accessible to the user 16. The store may also comprise the user computer 24. The method may also be used to ship the labels 108, for example, or a permanent pre-printed mylar label, for example, or even the customizable remote control 10 or a component of the remote for later installation. The remote 10 may be shipped pre- or post-downloading the virtual configuration and pre- or post-installation of the virtual configuration.

**[0052]** Fig. 17 schematically depicts another approach for providing a customer 16 with a hand-held device 210. The customer 16 interfaces with the computer 212 which is connected to the Internet 28. Via the Internet 28 the customer 16 provides the first supplier site 214 with a preferred configuration (also referred to as a preferred virtual configuration). The preferred configuration may include case design, function programming, as well as key assignment, for example. The preferred configuration is downloaded, or preferably burned, into a chip 216, for example. The first supplier 214 ships the chip 216 to a predetermined location 218, which is preferably a third supplier site 220. The preferred configuration may also be transmitted to a second supplier site 222 wherein the second supplier provides a case 224, which in various preferred embodiments may be an LCD remote control such as shown in Figs. 11 or 12 or a hard key remote control such as shown in Fig. 8. The second supplier then ships the case 224 to the third supplier site 220. The third supplier then assembles the components (216 and 224) and ships the hand-held device 210 to a second predetermined site 226, the second predetermined site being accessible to the customer 16, and preferably being the home or business, for example, of

the customer 16. The designations of first, second, etc. are merely used for convenience and are not intended to indicate limitations of the invention or order in an inventive process. Also, the sites may be separated or colocated, depending on the application. It should also be appreciated that the customer in this context is not necessarily the final end user of the device — he may, for example, be a store proprietor or original equipment manufacturer ("OEM") ordering one or more devices for resale.

**[0053]** While the invention has been particularly shown and described with reference to particular embodiments thereof, it will be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the invention. The scope of the claimed invention is intended to be defined by following claims as they would be understood by one of ordinary skill in the art with appropriate reference to the specification, including the drawings, as warranted.

#### Claims

1. A method of selecting command codes for use in a remote control, the method comprising:
  - displaying to a user at a client computer a plurality of operations capable of being performed by a consumer electronic device; and
  - in response to a user selecting one of the displayed plurality of operations at the client computer, selecting from a database accessible to a server computer a command code that will cause the consumer electronic device to perform the selected operation when transmitted from the remote control.
2. The method of claim 1, comprising the step of displaying an image representing the remote control.
3. The method of claim 2, wherein the step of displaying the image representing the remote control comprises the step of indicating newly configured keys.
4. The method of claim 2, wherein the step of displaying the image representing the remote control comprises the step of indicating configurable keys.
5. The method of claim 1, comprising the step of displaying a selection comprising a plurality of consumer electronic devices to the user.
6. The method of claim 5, comprising the step of selecting a particular consumer electronic device manufactured by a particular manufacturer in response to a selection by a user from a plurality of manufacturers.



7. The method of claim 1, wherein the step of displaying comprises transmitting a Web page from the server computer to the client computer, the Web page having information for displaying to the user the plurality of operations.
8. The method of claim 1, comprising the step of transmitting the command code for downloading to the remote control.
9. The method of claim 8, wherein the step of transmitting the command code comprises the step of transmitting the command code to a user selected location.
10. The method of claim 9, wherein the step of transmitting comprises the step of transmitting the command code to the client computer.
11. The method of claim 8, wherein the step of transmitting the command code comprises the step of transmitting the command code to a predetermined location.
12. The method of claim 8, comprising the step of providing customized labeling.
13. The method of claim 12, wherein the step of providing customized labeling comprises the step of shipping the customized labeling from a predetermined location.
14. The method of claim 8, comprising the step of providing pre-printed labeling.
15. The method of claim 8, comprising the step of shipping the customized remote control to a predetermined location.
16. The method of claim 8, comprising the step of shipping the customized remote control to a user selected location.
17. The method of claim 1, comprising the step of generating a customized label for indicating to the user a mapping between a key of the remote control and the command code.
18. The method of claim 1, comprising the step of transmitting a code sequence to the client computer to re-configure a portion of the customized remote control.
19. A customizable remote control comprising:
  - a case;
  - a plurality of pre-programmed standard keys on the case;

a plurality of configurable keys on the case; and  
a plurality of electronically generated customized labels corresponding to the plurality of configurable keys.

20. A customizable remote control comprising:

- a plurality of pre-programmed standard keys;
- a plurality of configurable keys;
- means for assigning at least one function to at least one of the plurality of configurable keys; and
- means for labeling the configurable keys.

21. The remote control of claim 20, wherein the means for labeling comprises computer generated labeling fitted in a recess.

22. The remote control of claim 20, comprising means for representing a user selected key layout.

23. A method of providing a customized consumer electronic device comprising the steps of:

- transmitting a Web page for displaying to a user a plurality of operations performable by the consumer electronic device and information for mapping at least one of the operations to a key on the consumer electronic device;
- receiving from the user a selection of one of the operations and an identification of a key, to which the operation is to be mapped;
- forming a virtual configuration comprising the operation selection and key identification, whereby the virtual configuration is useable in the consumer electronic device.

24. The method of 23, comprising placing the virtual configuration in a transmission and transmitting the virtual configuration to a user selection location.

25. The method of 23, comprising placing the virtual configuration in a transmission for transmission to a microchip for subsequent installation into the to be customized consumer electronic device.

26. The method of claim 23, comprising the step of shipping a customizable consumer electronic device to a predetermined location, wherein the customizable consumer electronic device is the customized consumer electronic device prior to customization.

27. The method of claim 26, wherein the step of transmitting comprises programming the virtual configuration into a microchip and the method comprises the steps of:

- shipping the microchip to the predetermined lo-

cation; and  
installing the microchip in the customizable  
consumer electronic device.

28. A method of allowing a user to customize a remote control capable of commanding operation of a consumer electronic device, the method comprising:

transmitting a Web page for displaying to a user a plurality of operations performable by the consumer electronic device and information for use in mapping an operation to a key on the remote control;  
receiving from the user a selection of one of the plurality of operations and an identity of a key on the remote control to which the selection operation is to be mapped; and  
selecting code from a database for configuring the remote control to cause the transmission of a command that causes the consumer electronic device to perform the selected operation when the selected key is activated.

29. A method of selecting command codes for use in a remote control, the method comprising:

receiving a message having information indicative of an operation capable of being performed by a consumer electronic device; and  
in response to the message, selecting from a database for installation into the remote control a command code that will cause the consumer electronic device to perform the operation when transmitted from the remote control.

30. A method of selecting command codes for use in a remote control, the method comprising:

presenting to a user a plurality of operations capable of being performed by a consumer electronic device;  
receiving from the user information pertaining to a method of payment; and  
in response to a verification of the method of payment, selecting from a database for installation in the remote control a command code that will cause the consumer electronic device to perform the selected operation when transmitted from the remote control.

31. A method of modifying a remote control comprising the steps of:

displaying to a user at a client computer a plurality of command sets corresponding to a respective plurality of consumer electronic devices;  
in response to a user selection of at least one

command set, selecting from a database a plurality of command codes operable with the respective consumer electronic device to form the at least one command set; and  
creating a transmission including the at least one command set for allowing the command set to be downloaded to the remote control.

32. The method of claim 31, comprising the step of displaying an indication of how much memory will be used if the at least one of the plurality of command sets is downloaded.

33. The method of claim 32, wherein the step of displaying the indication comprises the step of displaying the indication as a percentage of memory of the remote control being modified.

34. The method of claim 33, wherein the step of displaying the indication comprises displaying the indication as a percentage of available memory.

35. A method of upgrading a hand held device comprising the steps of:

displaying to a user at a client computer a selection comprising a plurality of the command codes; and  
in response to a selection by the user of at least one of the plurality of command codes provided in the selection, forming a transmission including the at least one command code for ultimate use in the hand held device.

36. A customizable hand held device comprising:

a hand held unit having a display screen;  
memory communicable with the display screen and including at least three programming sets for respectively controlling at least three devices, wherein at least two of the at least three programming sets are associated with a common brand; and  
set up programming in the unit for enabling a user to select at least one of the at least three programming sets during a set up mode, wherein the at least two programming sets associated with the common brand are represented in a prioritized order.

37. A method of configuring a remote control comprising the steps of:

accessing a database via a Web site that includes information for displaying a plurality of functions;  
selecting at least one of the functions; and  
downloading the function.

38. A method of enabling a user to customize a remote control, the method comprising the steps of:

in response to a user selection, selecting among a plurality of functions at least one desired function; and  
forming a virtual configuration including the at least one desired function.

39. A method of enabling a user to customize a remote control, the method comprising the steps of:

displaying a graphical user interface for enabling the user to select at least one function operable with the remote control; and  
creating a transmission including the at least one function for ultimate use of the one function by the remote control.

40. A remote control kit comprising:

a customizable remote control including a plurality of configurable keys;  
labeling means for identifying the configurable keys; and  
means for customizing the remote control including a user accessible display displaying a plurality of customizable features, by which the user may configure the configurable keys.

41. A device for use with a customizable remote control, the device comprising:

a writable medium; and  
a user selected virtual configuration stored in the writable medium.

42. A customizable remote control comprising:

means for accessing a Web page to ultimately configure configurable keys of the remote control; and  
means for labeling the configurable keys.

43. A method of configuring a remote control comprising the steps of:

a user accessing a Web page;  
a user selecting at least one function from the Web page; and  
a user requesting that the function be downloaded to the remote control to configure the remote control.

44. A remote control comprising:

a touch screen displaying graphical user interfaces; and

programming for displaying the graphical user interfaces according to a predetermined priority schema.

45. A handheld user interface for use in an interactive environment, the interface comprising:

a touch screen;  
means for displaying on the touch screen an icon representing a purchased product or service;  
means for receiving a code associated with the purchased product or service, wherein the code provides access to the purchased product or service; and  
means for transmitting the code to gain access to the purchased product or service upon actuation of the purchase icon.

46. A method of customizing a user's device having a display screen, the method comprising the steps of:

receiving from a user information identifying an original equipment manufacturer's (OEM) device;  
determining a face layout corresponding to the OEM device;  
selecting from a database simulation programming operable with the user's device, wherein the simulation programming is adapted to simulate the face layout on the display screen of the user's device.

47. The method of 47, wherein the user's device is a handheld remote, the face layout comprises a key layout corresponding to the OEM device, and wherein the step of selecting comprises selecting command codes associated with keys represented in the key layout.

48. A method of customizing a remote control comprising the steps of:

displaying to a user at a client computer a plurality of operations capable of being performed by a consumer electronic device;  
displaying to the user instructions pertaining to forming a user selected sequence comprising a user selected plurality of the plurality of operations; and  
forming a transmission including code data corresponding to the user selected sequence for use in downloading the code data to the remote control.

49. A method of customizing a remote control comprising the steps of:

displaying to a user at a client computer a plurality of pre-programmed sequences comprising a plurality of operations capable of being performed by one or more consumer electronic devices; and

5

in response to a user selection, causing at least one of the pre-programmed sequences to be downloaded to the remote control.

50. A method of customizing a remote control comprising the steps of:

10

displaying a plurality of consumer electronic devices to a user at a client computer; and

in response to a user selection of at least one of the consumer electronic devices, displaying a plurality of pre-programmed sequences operable with the at least one of the consumer electronic devices the sequences being available for download to the remote control to be customized.

15

20

51. A method of enabling access to a pay-per-event, the method comprising the steps of:

25

displaying to a user at a client computer a selection of a plurality of events;

receiving payment associated with at least one of the selections; and

transmitting to a remote control a code for accessing the at least one of the selections.

30

52. A method of customizing a remote control, the method comprising the steps of:

35

displaying to a user at a client computer a plurality of remote control parameters for customizing the remote control; and

in response to a selection by user of at least one of the displayed remote control parameters, forming a virtual configuration whereby the remote control maybe customized.

40

45

50

55


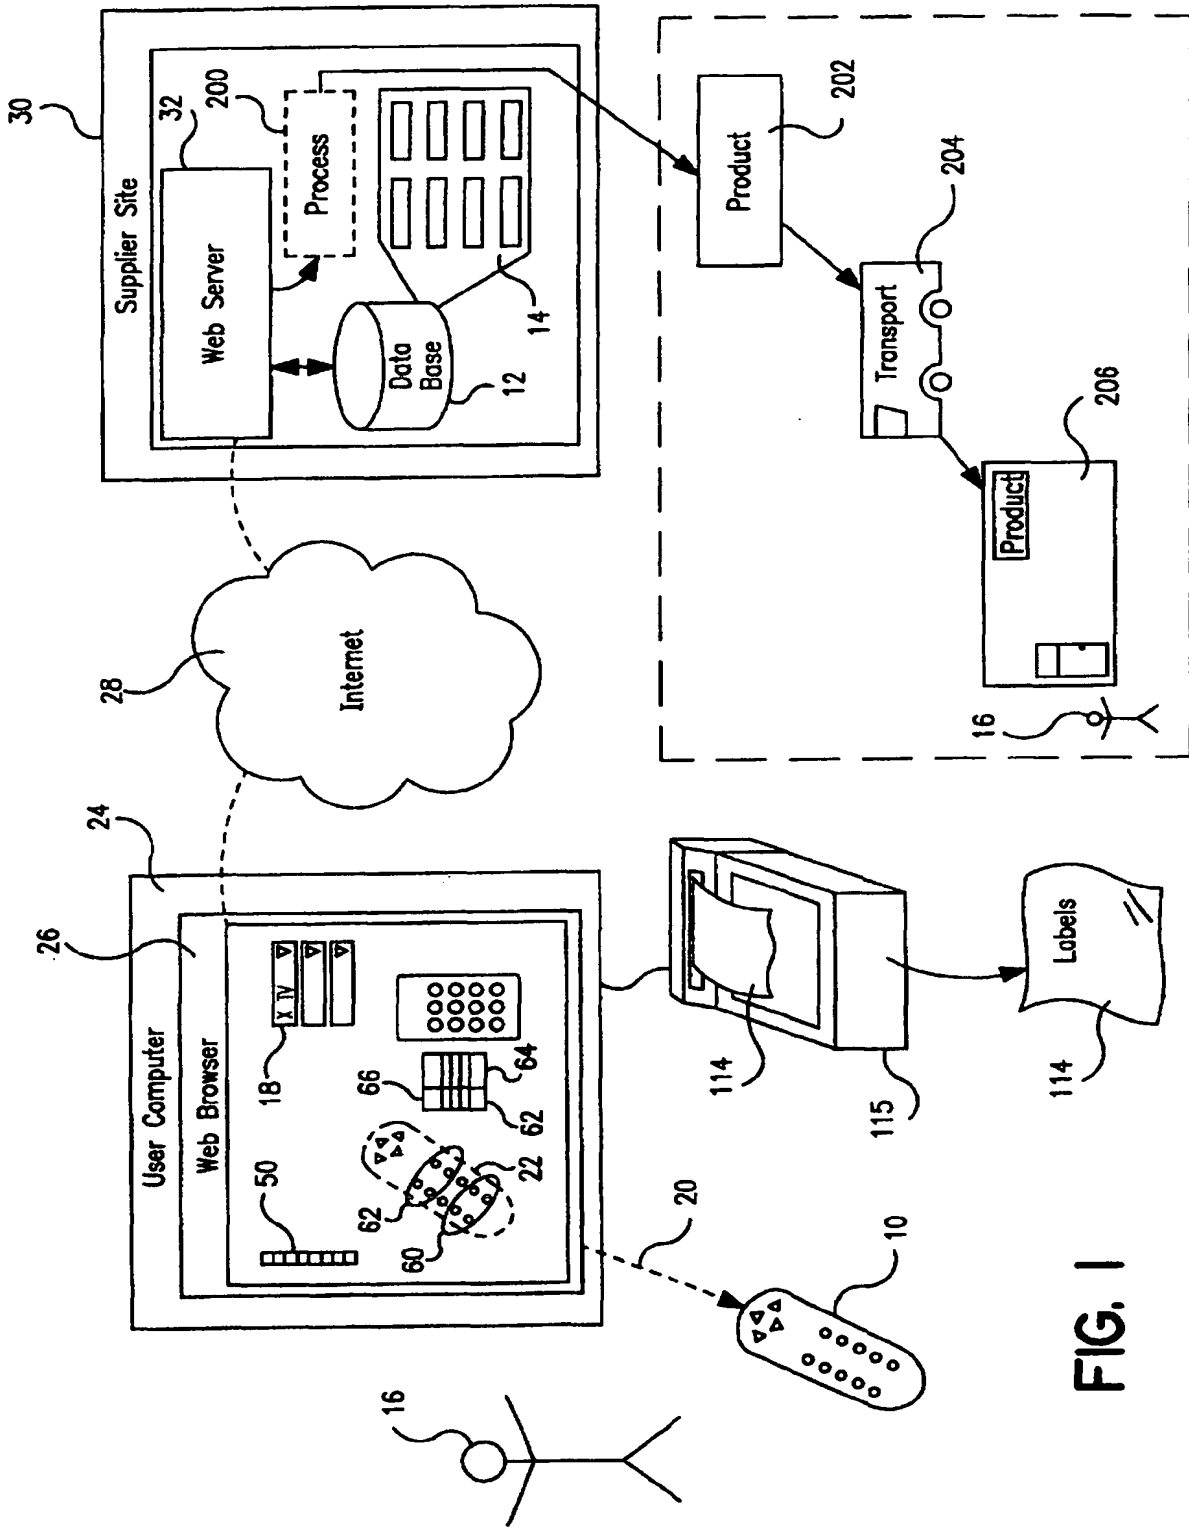


FIG. 1

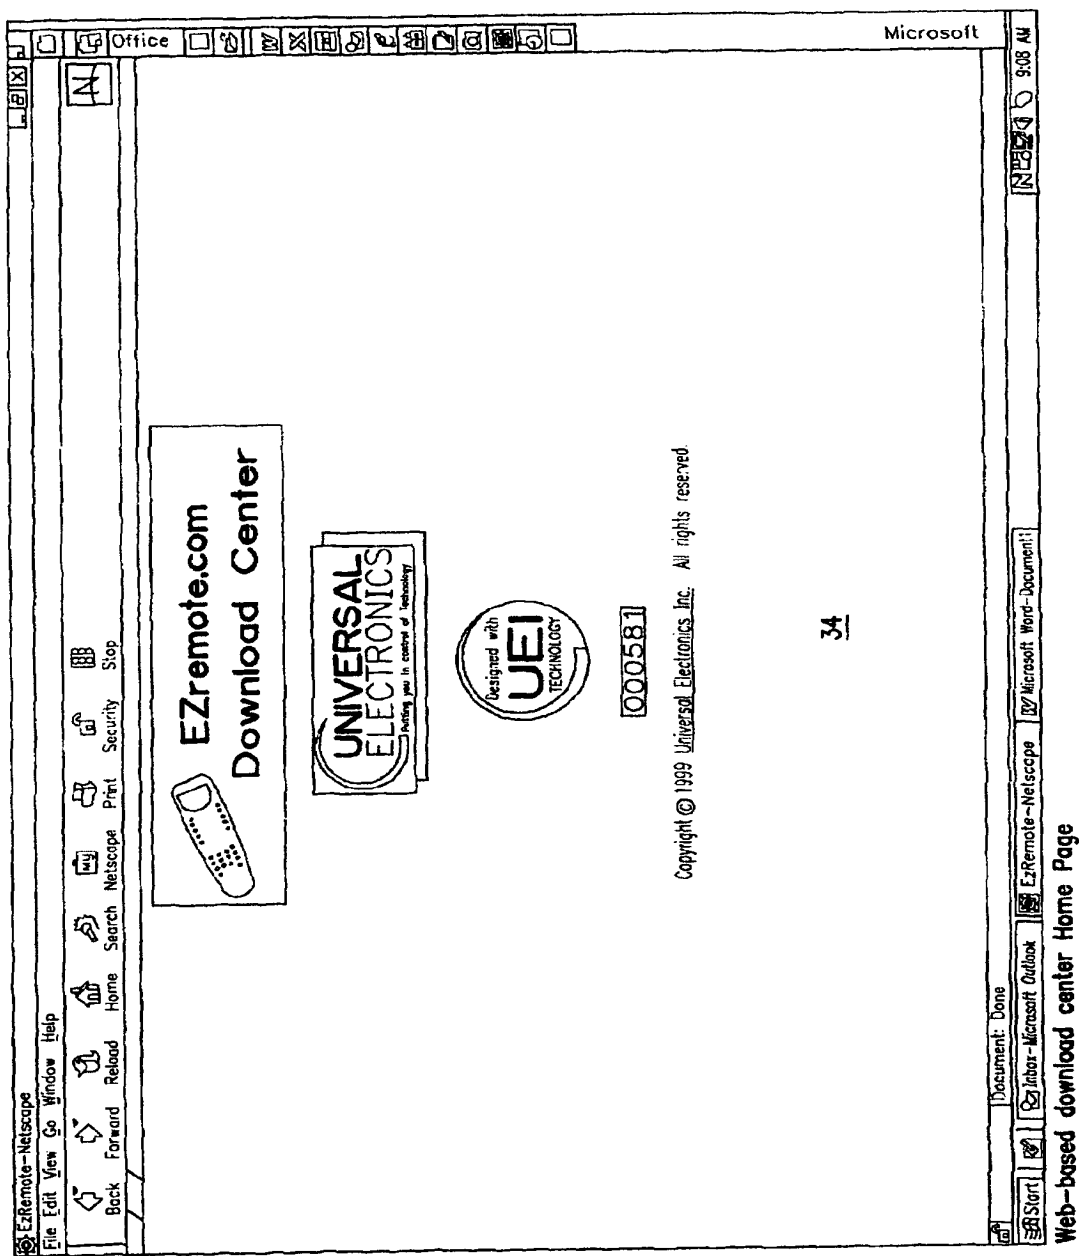

2  
F/G.

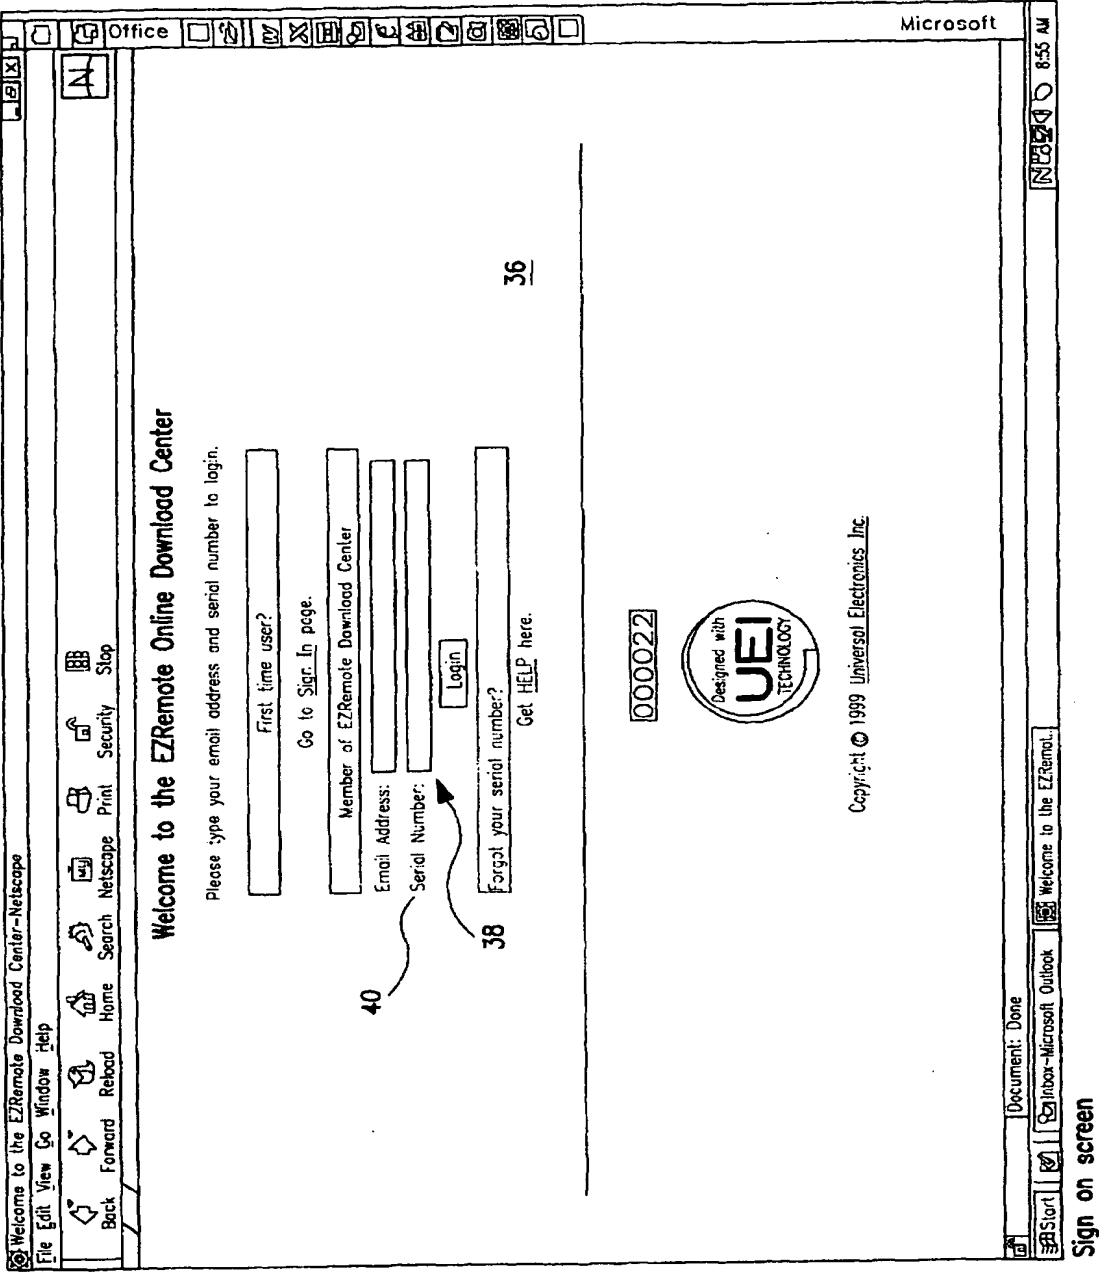


FIG. 3

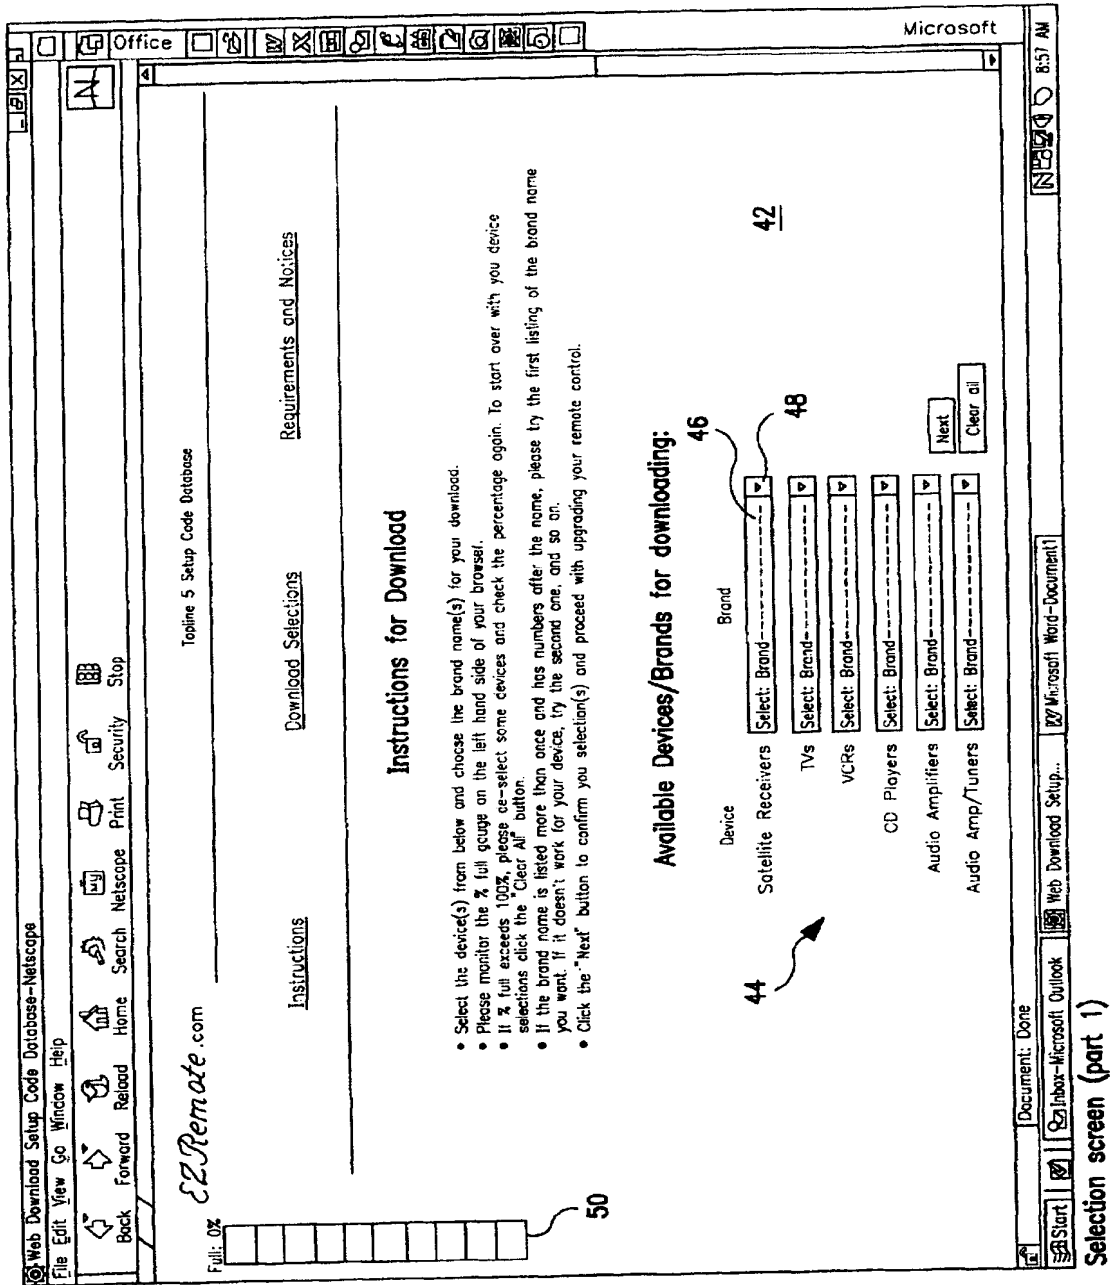


FIG. 4a



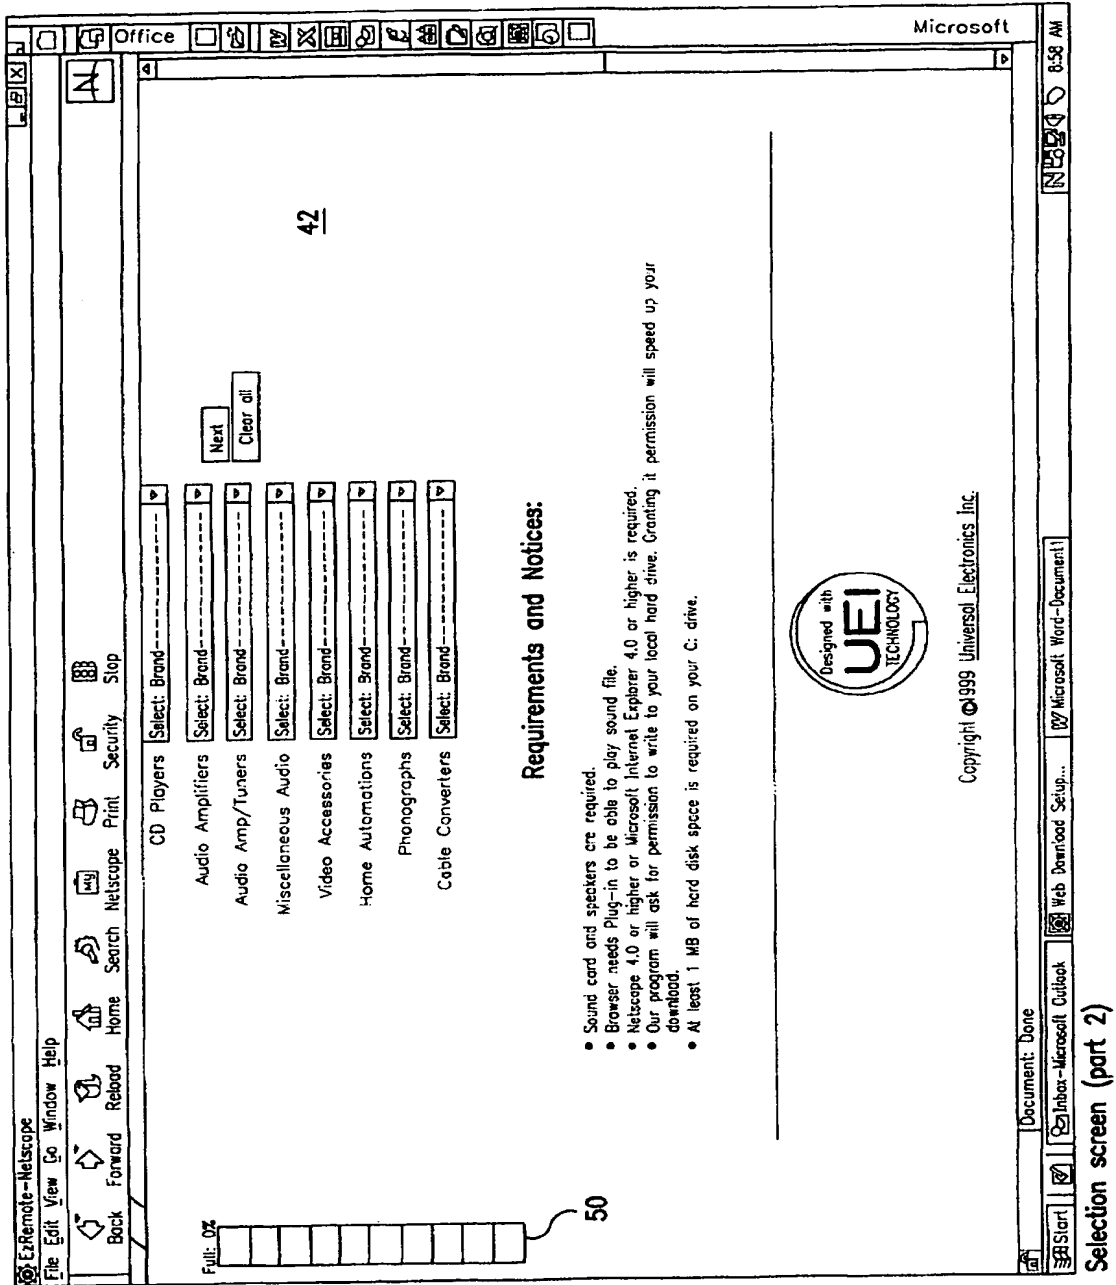


FIG. 4b

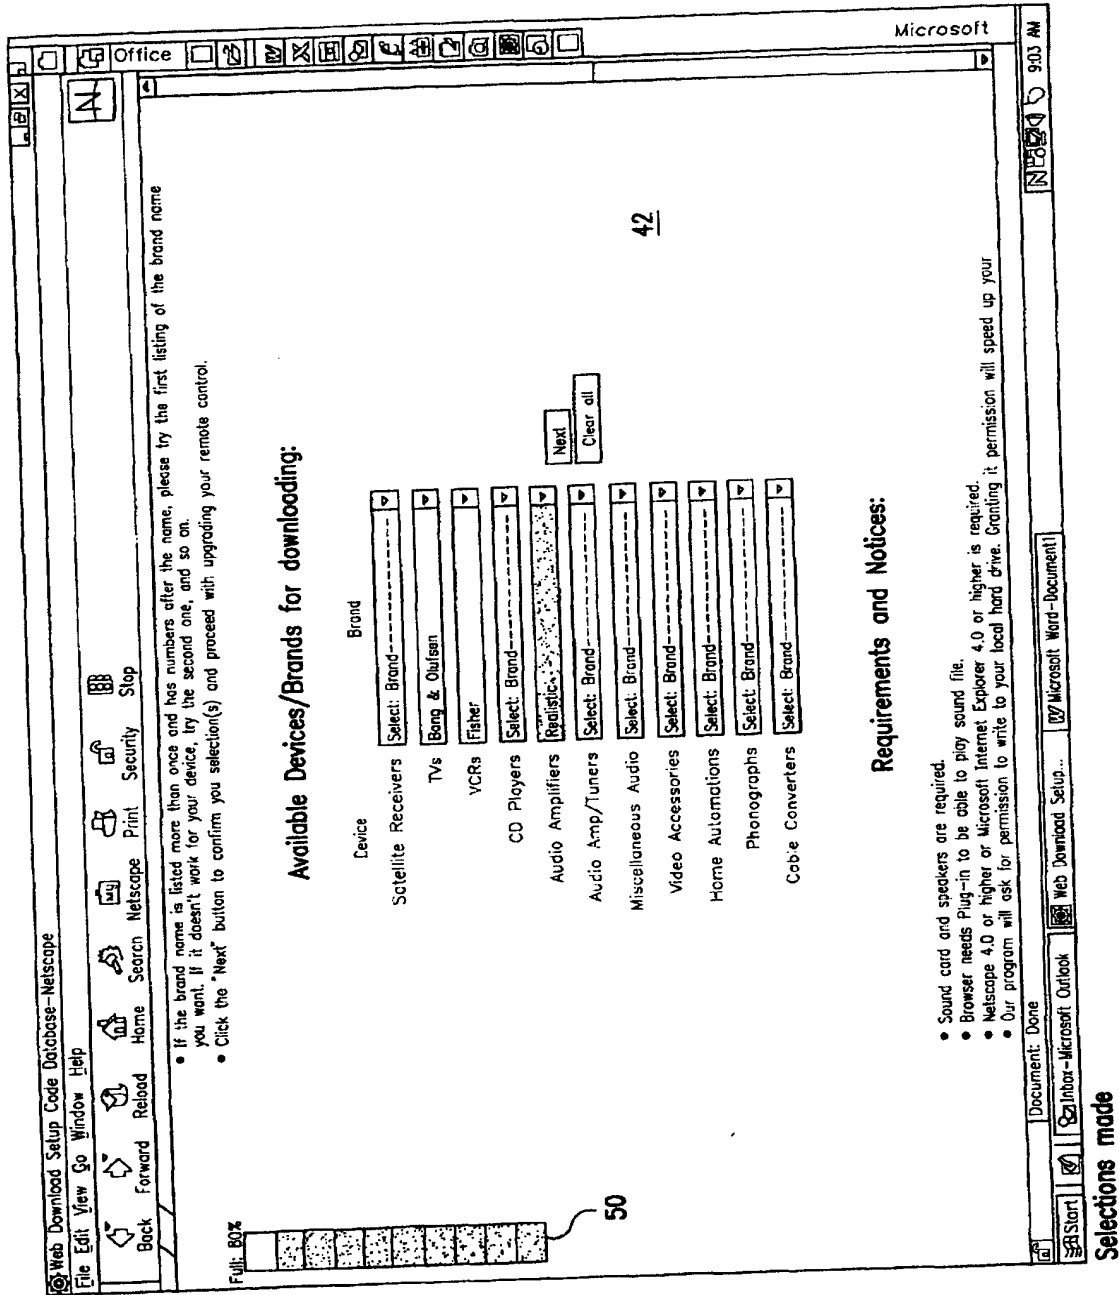


FIG. 5

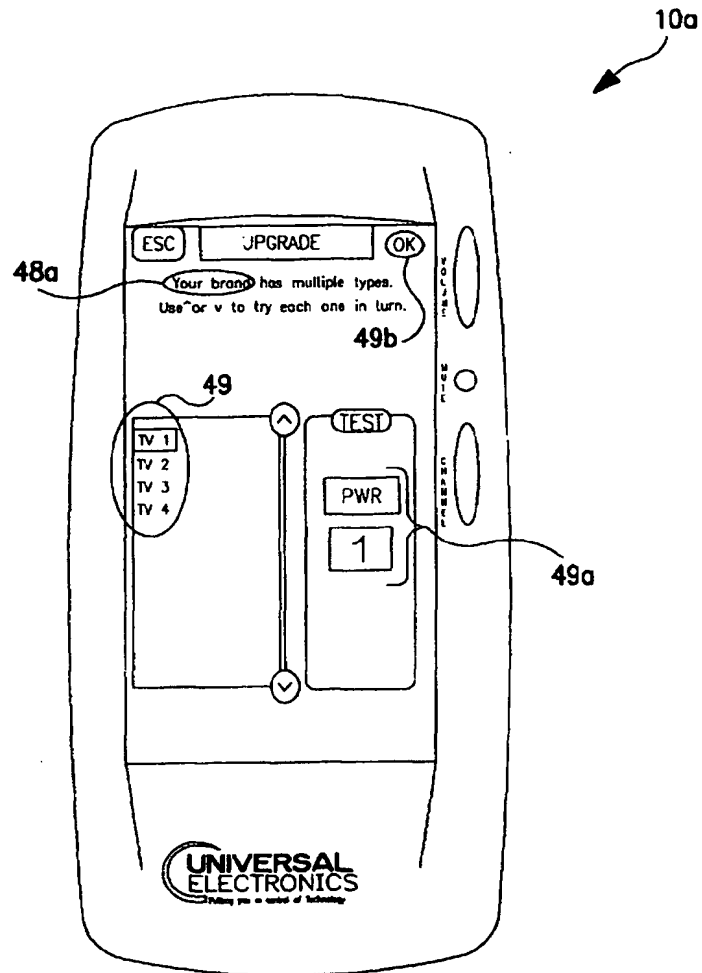


FIG. 5a

FIG. 5b

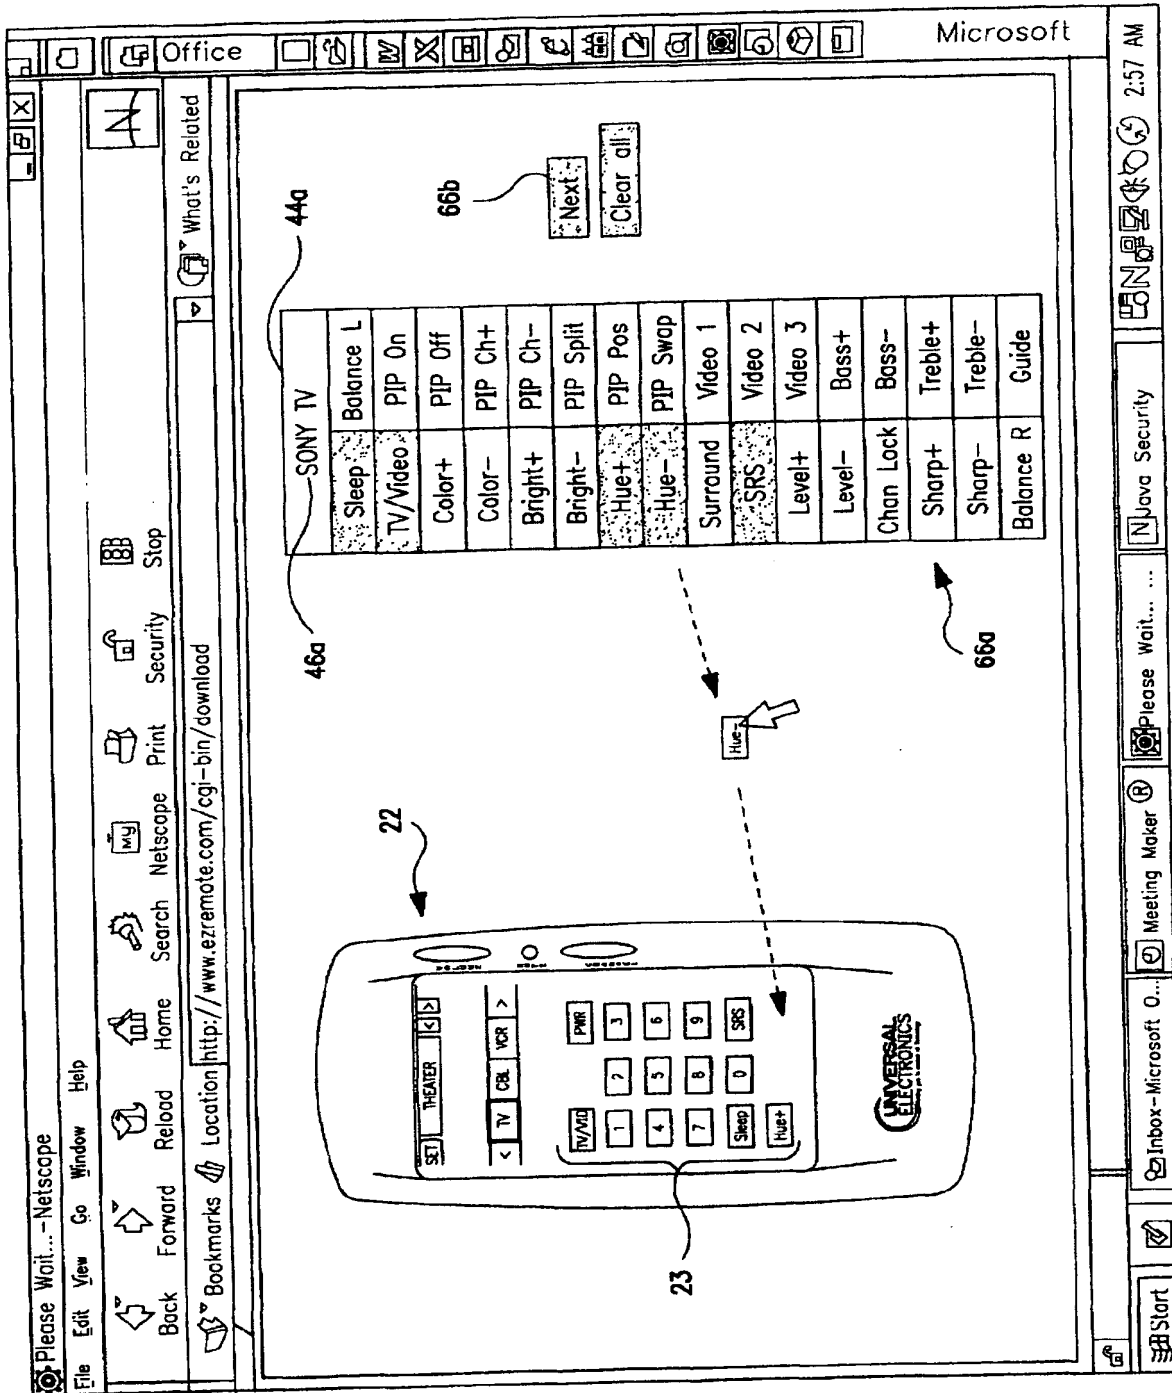


FIG. 6

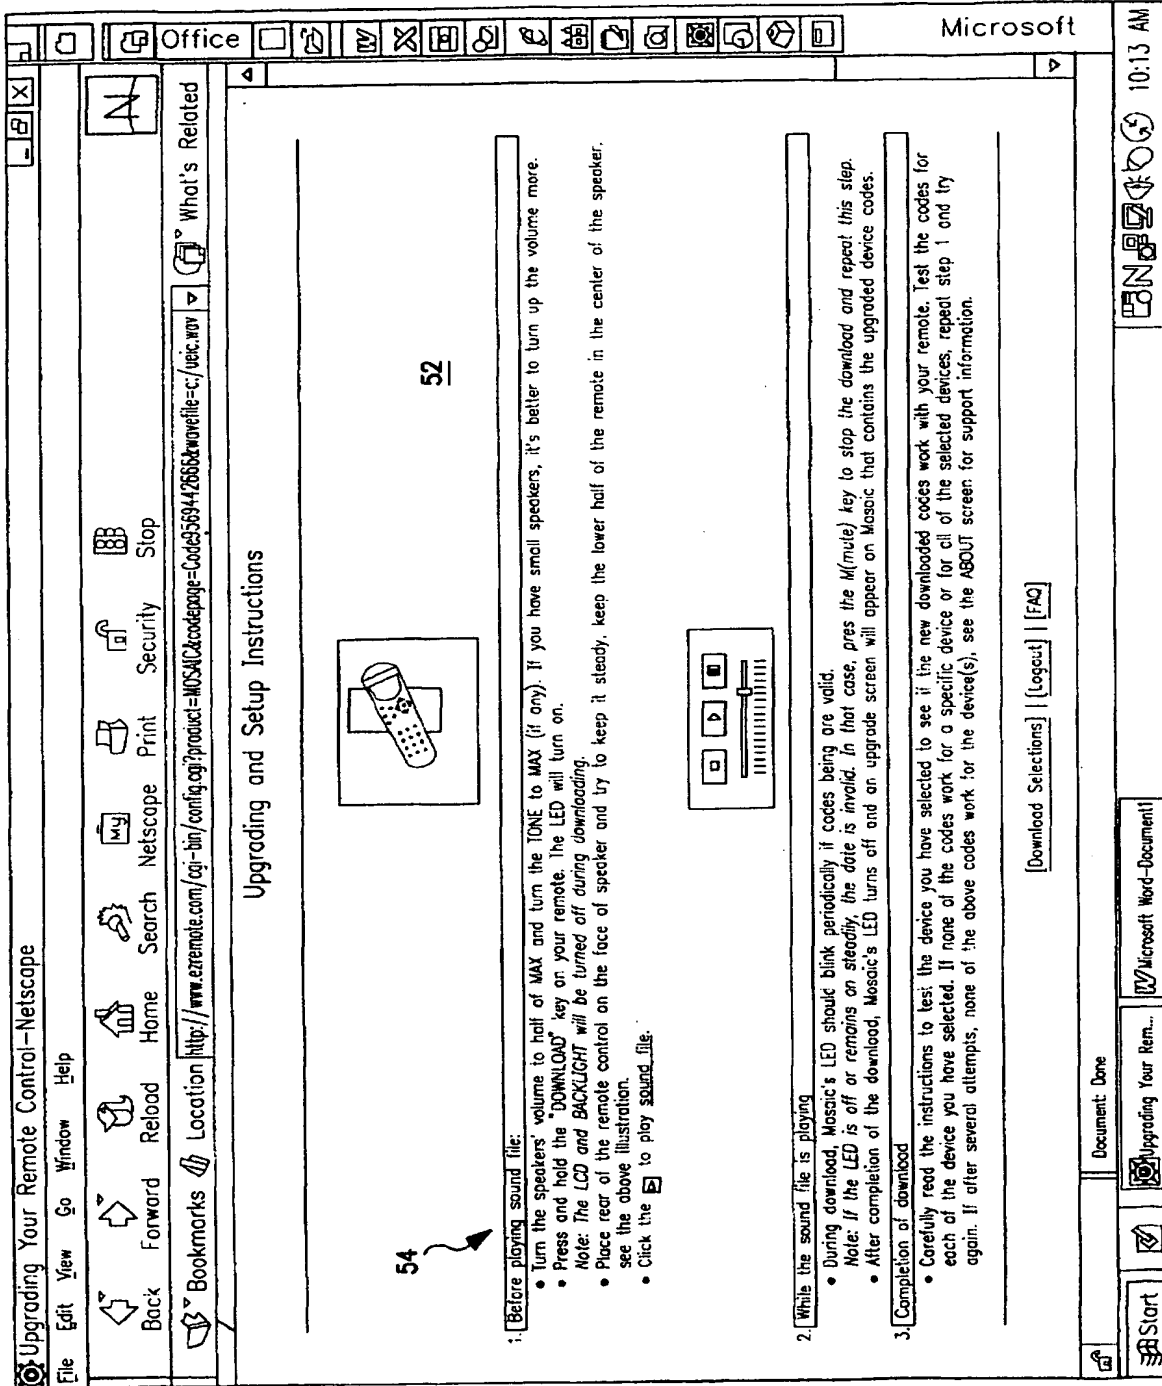


FIG. 7

Microsoft

8:44 AM

Office

What's Related

Location file:///M:/PROJECT/PATENT/IL\_config/Web\_site/signin.htm

Back Forward Reload Home Search Netscape Print Security Stop

Bookmarks

### Welcome to the EZRemote Download Center

If you have signed in to this web site before, please click here --> [Login](#).

First Time User?

If this is your first time on our web site, please complete the form below. If you don't have the serial number for you remote, we will send you one via email. Only one serial number per product will be assigned to a user per email address.

#### About Yourself

Email Address: \*

First Name: \* MI: \*

Last Name: \*

Street 1: \*

Street 2: \*

City: \*

State/Province: Please select a state \*

Zip/Postal Code: \*

Country: United States of America \*

Home Phone (with area code): \*

Extension: \*

Payment Method: Choose Payment Method \*

Name on Credit Card: \*

Credit Card Number: \*

Expiration Date: 01 2000 \*

Document: Done

Welcome to the EZR...

Start

Payment Screen

56

58

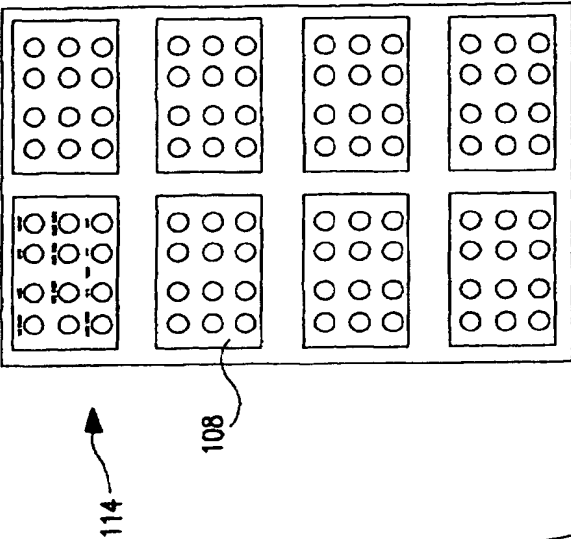
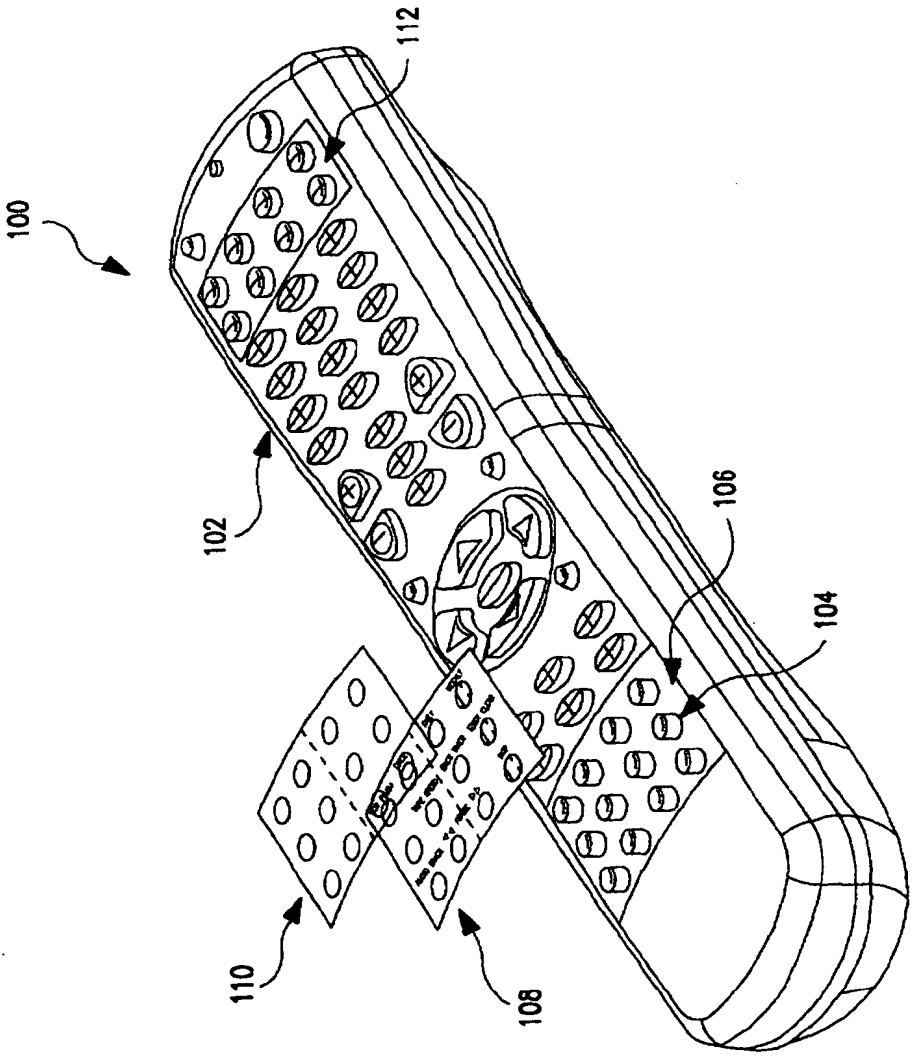


FIG. 8



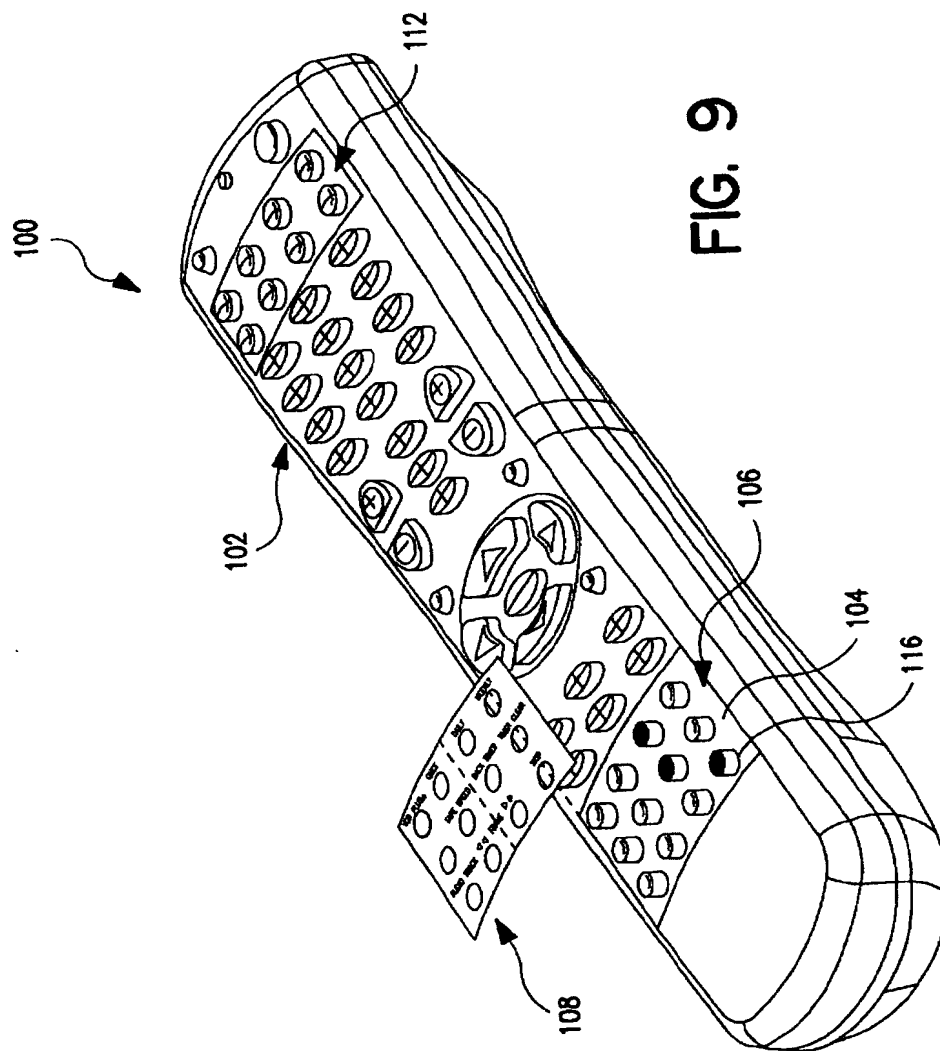
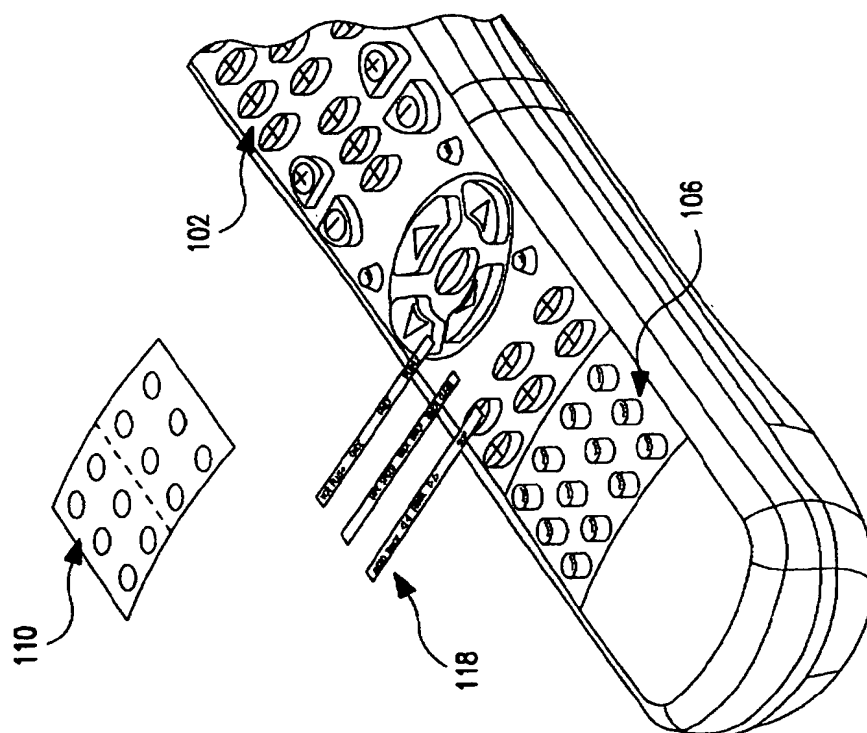




FIG. 10



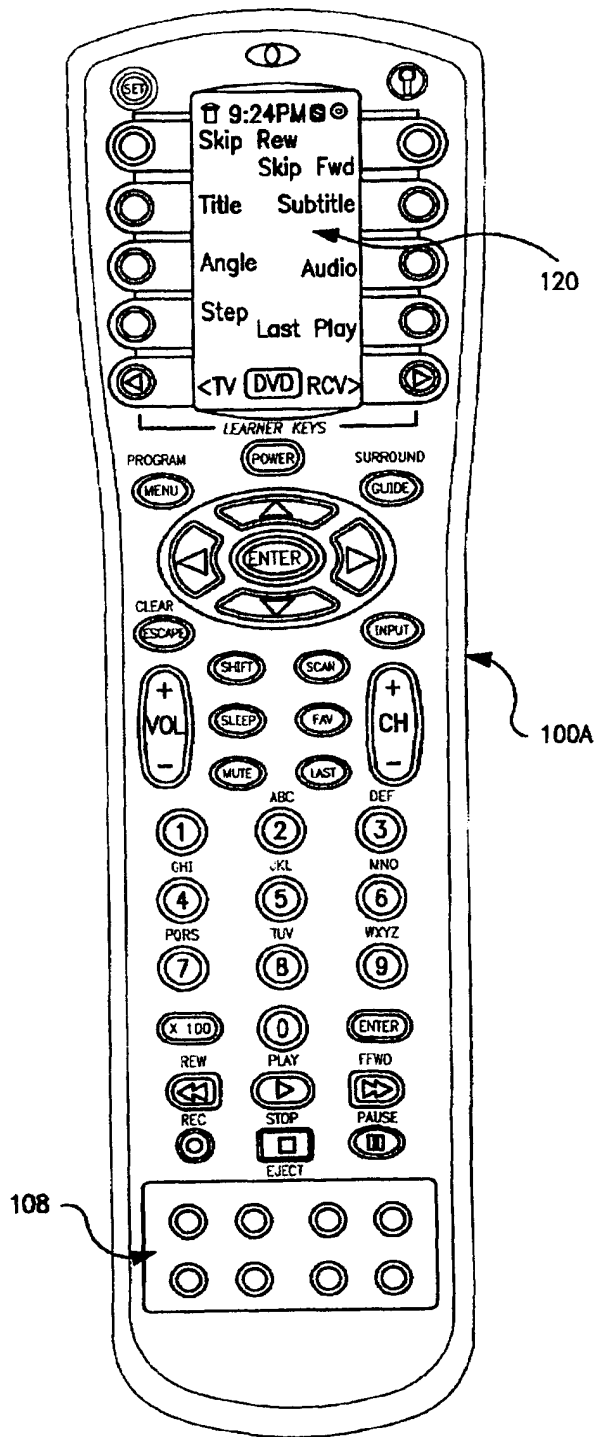


FIG. 11

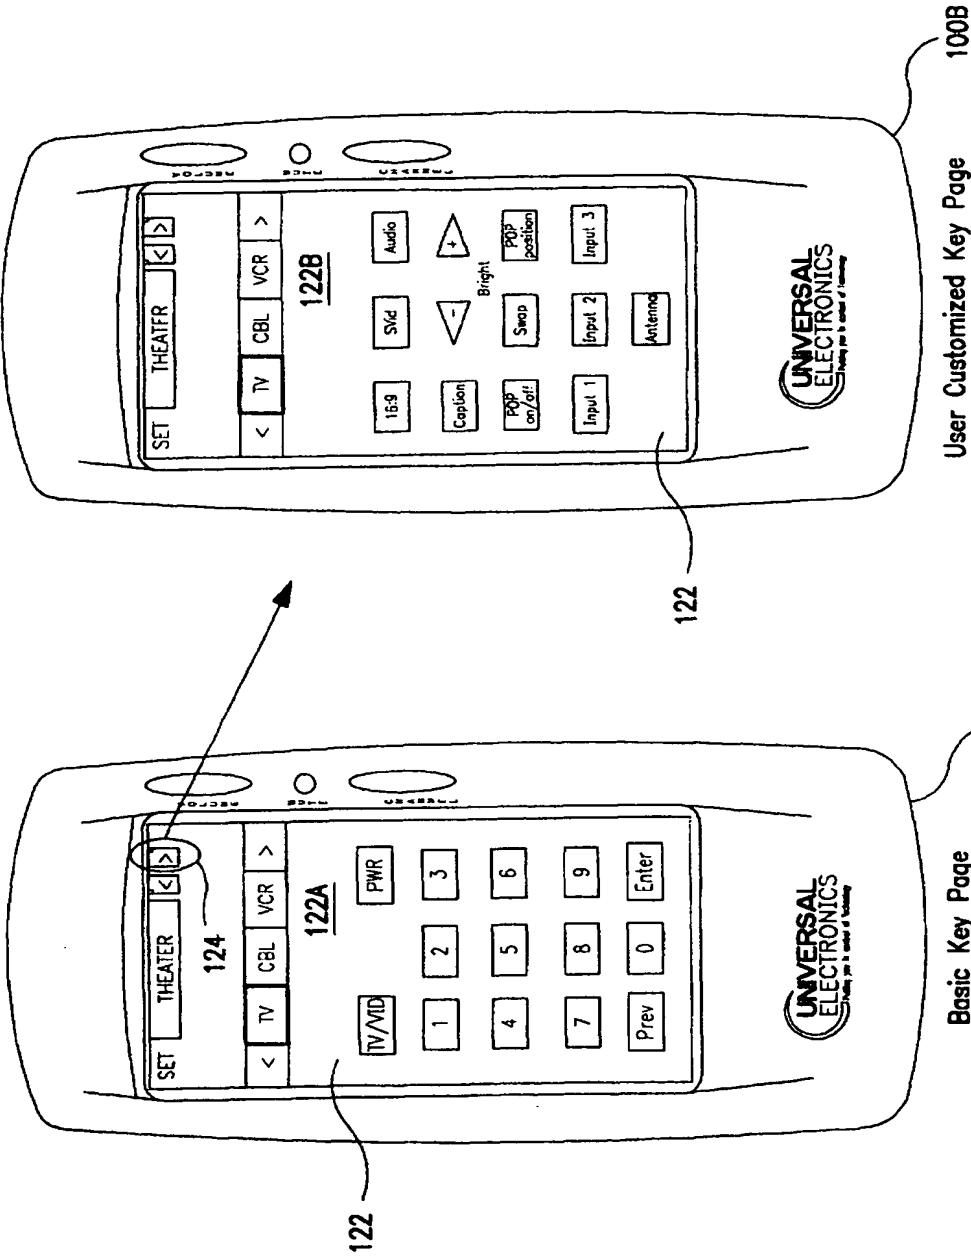


FIG. 13

FIG. 12

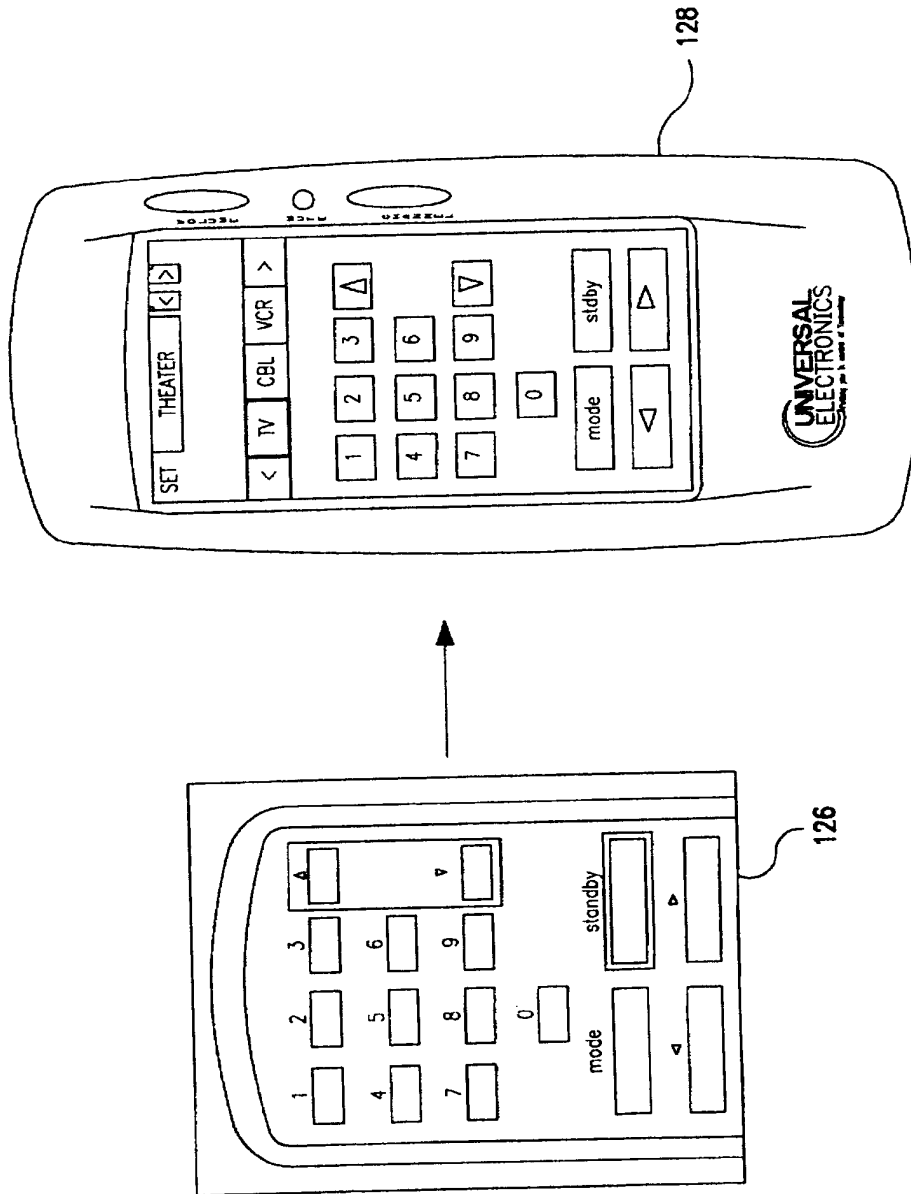


FIG. 14

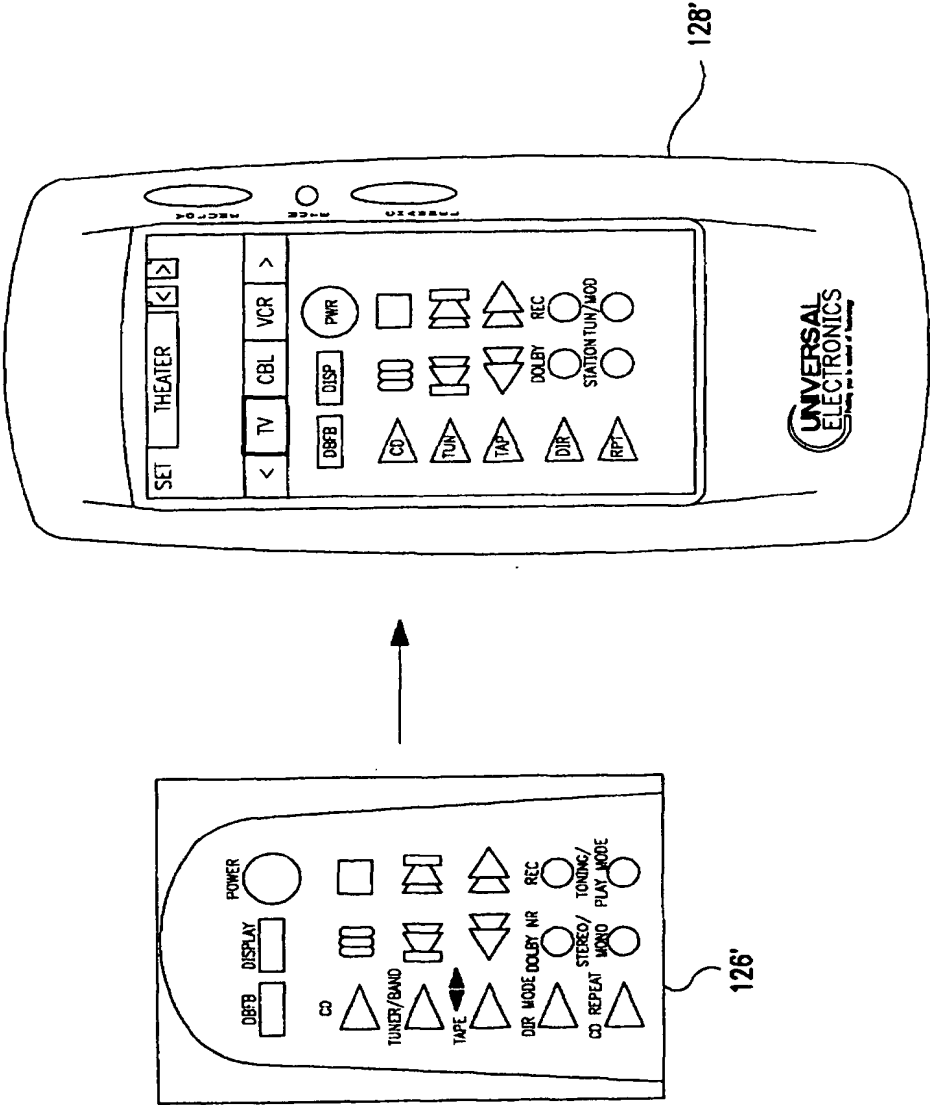


FIG. 15


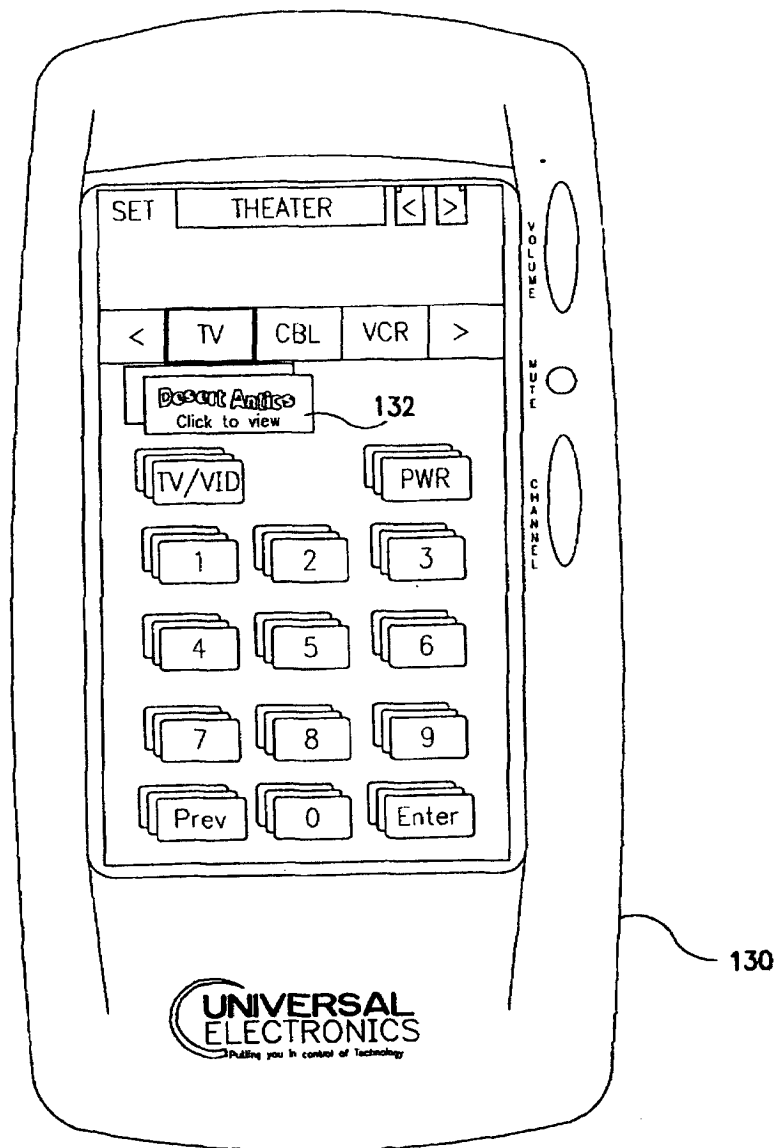


FIG. 16



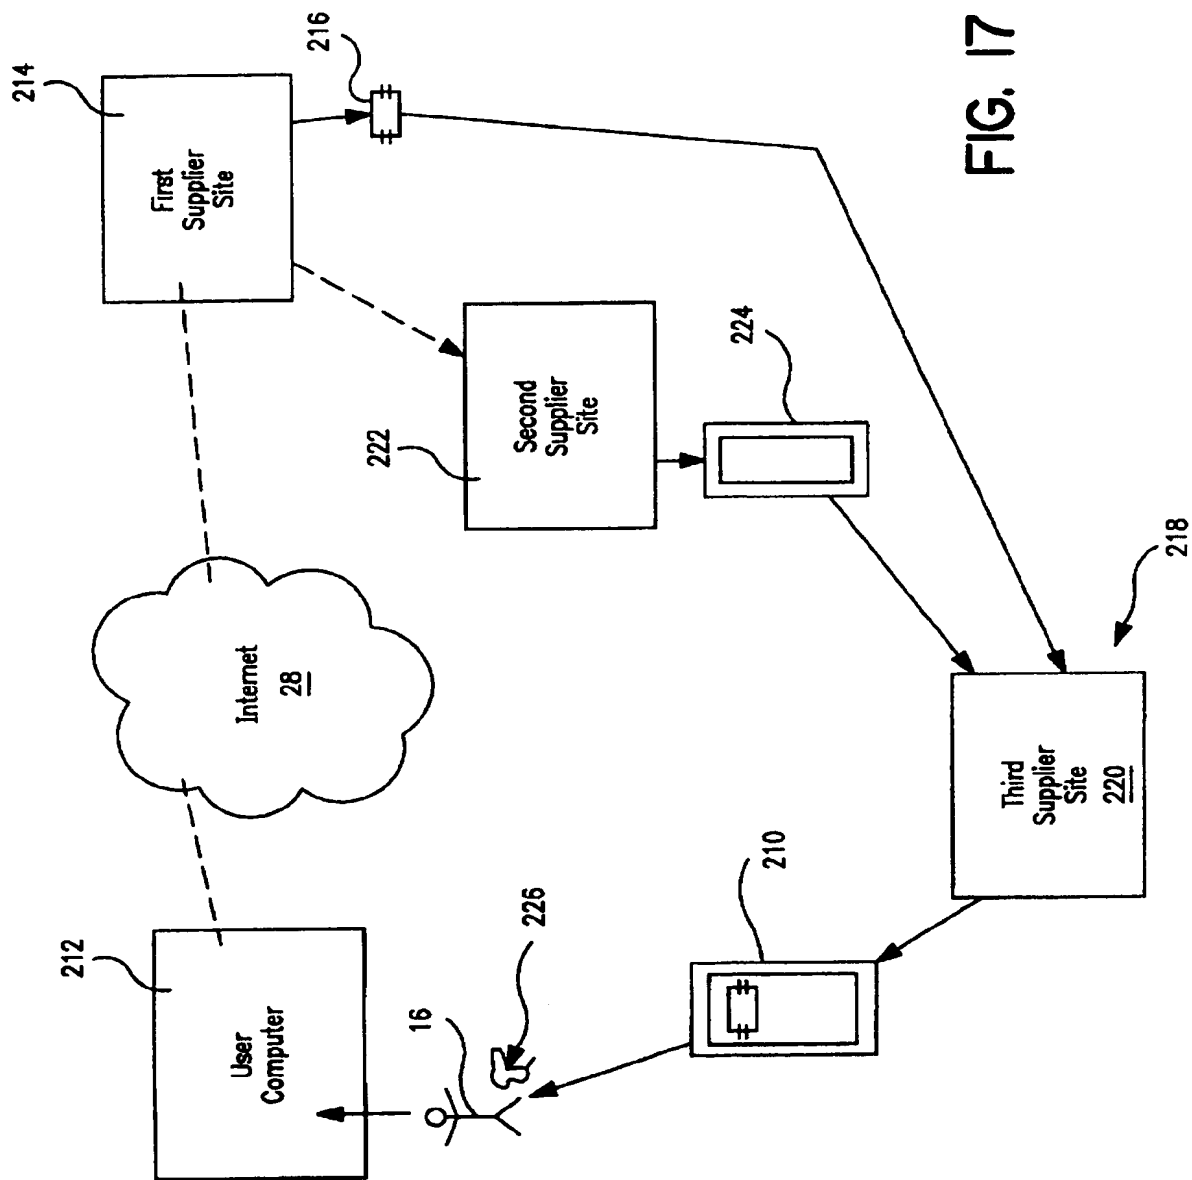

European Patent  
Office

# PARTIAL EUROPEAN SEARCH REPORT

Application Number

which under Rule 45 of the European Patent Convention shall be considered, for the purposes of subsequent proceedings, as the European search report

EP 01 30 6069

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 99 34564 A (VSIS INC) 8 July 1999 (1999-07-08)	1,5-12, 17-20, 22-24, 28,29, 31, 35-46, 48-50,52	H04B1/20
A	* abstract *  * page 6, line 15 - page 55, line 21 * * figures 1-10 *	2-4,21, 32-34,47	
X	WO 00 17738 A (KONINKL PHILIPS ELECTRONICS NV) 30 March 2000 (2000-03-30)	1,5-12, 17-20, 22-24, 28,29, 31, 35-46, 48-50,52	
A	* abstract *  * page 5, line 17 - page 9, line 28 * * figures 1,2 *	2-4,21, 32-34,47	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H04B
INCOMPLETE SEARCH			
<p>The Search Division considers that the present application, or one or more of its claims, does/do not comply with the EPC to such an extent that a meaningful search into the state of the art cannot be carried out, or can only be carried out partially, for these claims.</p> <p>Claims searched completely :</p> <p>Claims searched incompletely :</p> <p>Claims not searched :</p> <p>Reason for the limitation of the search:</p> <p>see sheet C</p>			
Place of search		Date of completion of the search	Examiner
THE HAGUE		26 February 2002	Tzimeas, K
CATEGORY OF CITED DOCUMENTS			
<p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P04C07)





European Patent  
Office

**INCOMPLETE SEARCH  
SHEET C**

Application Number  
EP 01 30 6069

Claim(s) searched completely:  
1-12, 17-24, 28, 29, 31-50, 52

Claim(s) not searched:  
13-16, 25-27, 30, 51

Reason for the limitation of the search (non-patentable invention(s)):

The claims relate to subject matter excluded from patentability under Art. 52(2) and (3) EPC. Given that the claims are formulated in terms of such subject matter or merely specify commonplace features relating to its technological implementation, the search examiner could not establish any technical problem which might potentially have required an inventive step to overcome. Hence it was not possible to carry out a meaningful search into the state of the art (Rule 45 EPC). See also Guidelines Part B Chapter VIII, 1-6.

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 6069

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-02-2002

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9934564      A	08-07-1999	US 6104334 A	15-08-2000
		AU 2093399 A	19-07-1999
		EP 1046264 A1	25-10-2000
		WO 9934564 A1	08-07-1999
WO 0017738      A	30-03-2000	BR 9906952 A	03-10-2000
		CN 1288539 T	21-03-2001
		CN 1288540 T	21-03-2001
		CN 1294800 T	09-05-2001
		WO 0017737 A1	30-03-2000
		WO 0017738 A1	30-03-2000
		WO 0018070 A1	30-03-2000
		WO 0017789 A1	30-03-2000
		EP 1044400 A1	18-10-2000
		EP 1046261 A1	25-10-2000
		EP 1046097 A1	25-10-2000
		EP 1044422 A1	18-10-2000

EPO FORM P055

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**